

AQUA POOLS
WE CREATE EXCELLENCE




AQUA ENGINEERING

Office: +357 24642254

Mobile: +357 99 94 95 93

info@aquapools.com.cy

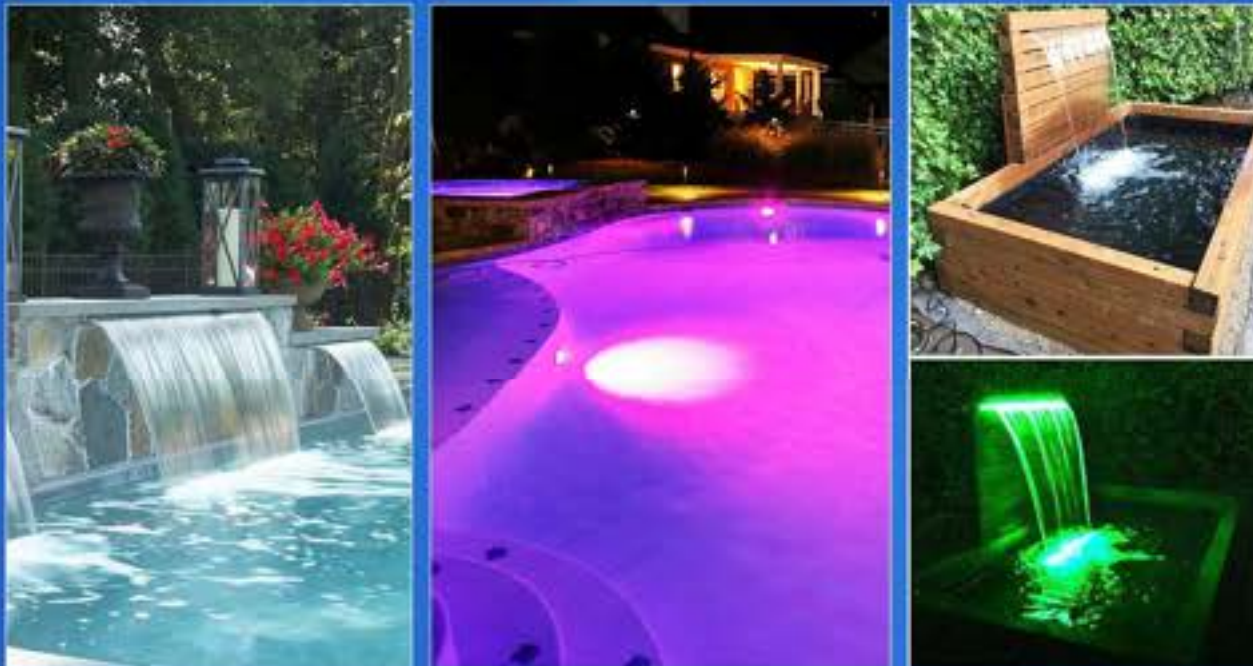


UNDERWATER POOL LIGHTING

AQUA POOLS
WE CREATE EXCELLENCE







Wiring diagram of pool light

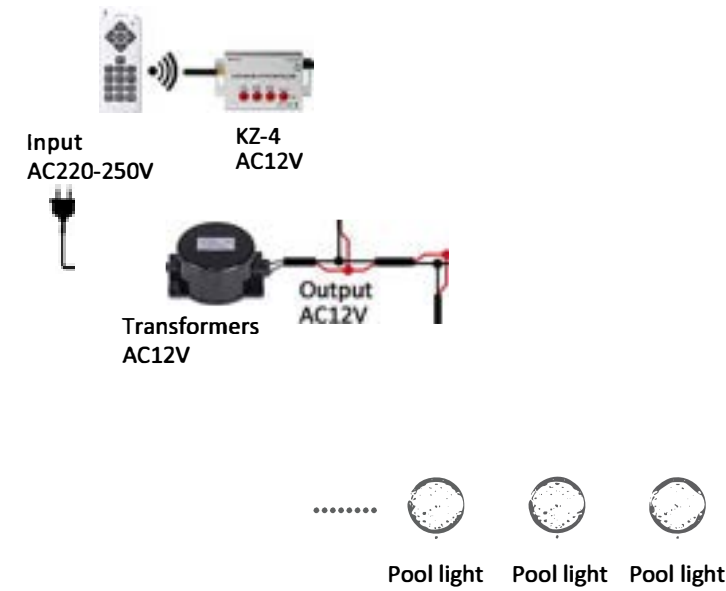


Wiring diagram of pool light

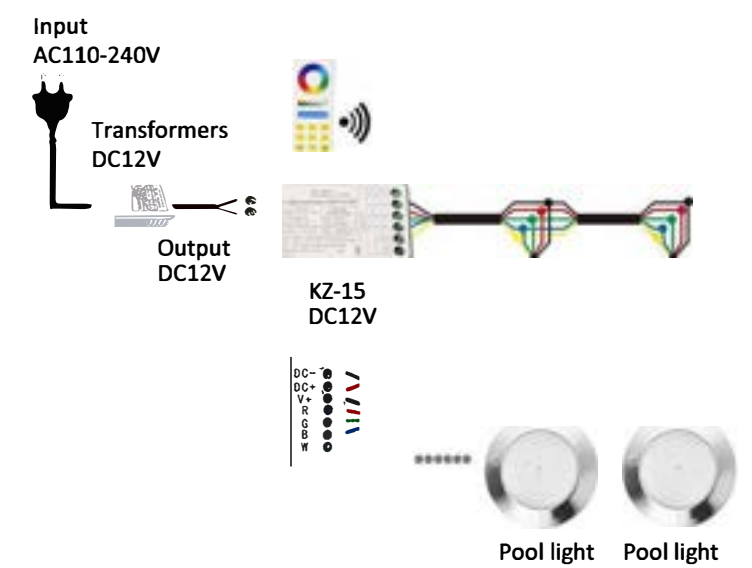

Wiring diagram of pool light

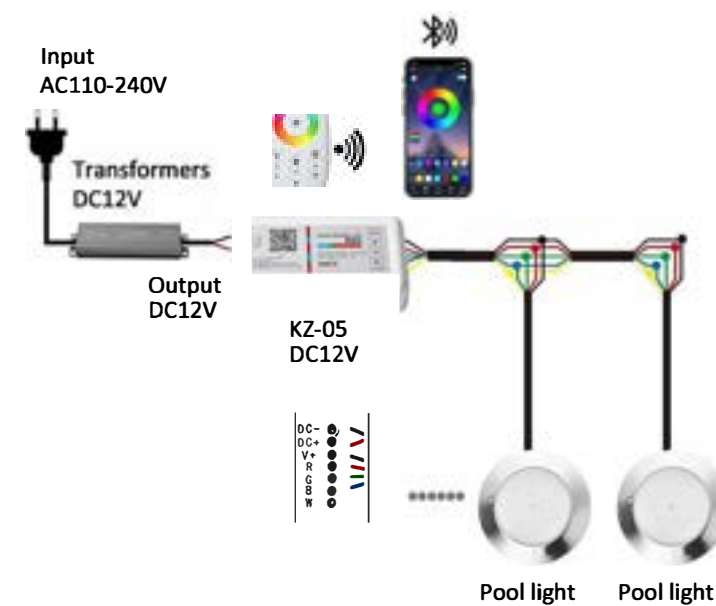

Wiring diagram of pool light

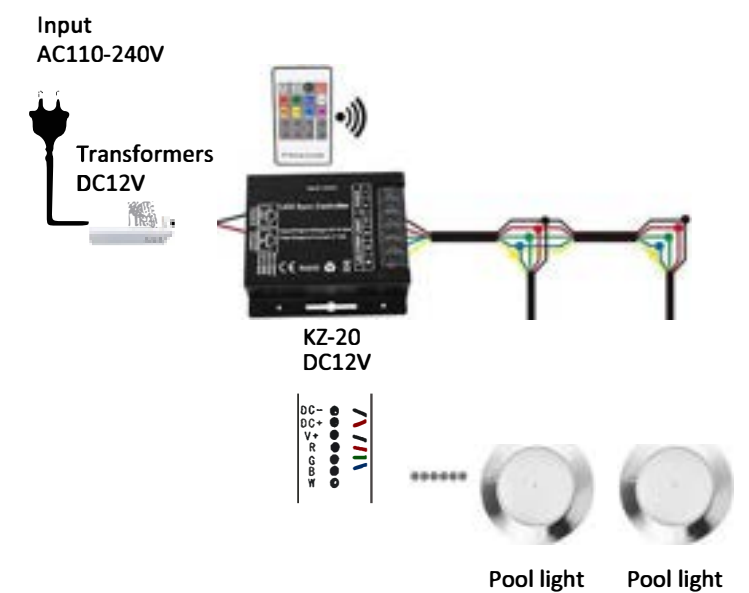



MODEL:DLX-YC280-AP



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC280-AP	D280*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			




MODEL:DLX-YC260-AP



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-AP	D260*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			




MODEL:DLX-YC260-3SP

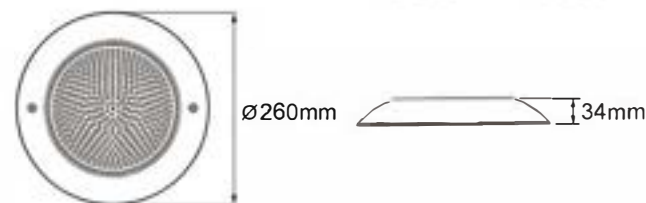


1. Concrete Pool Installation



2. Fiberglass Pool Installation

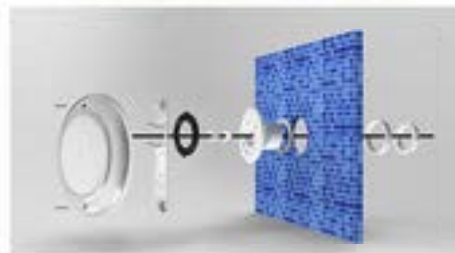


3. Fiberglass&Liner Pool Installation

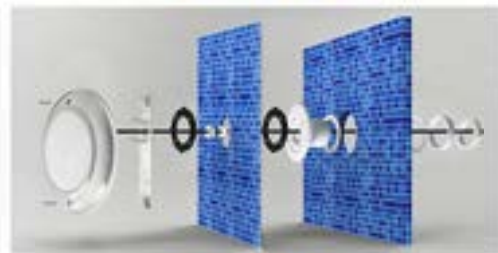


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-3SP	D260*H34	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazdling	Stainless Steel 304+Resin filled
				25W			
				35W			




MODEL:DLX-YC230-AP

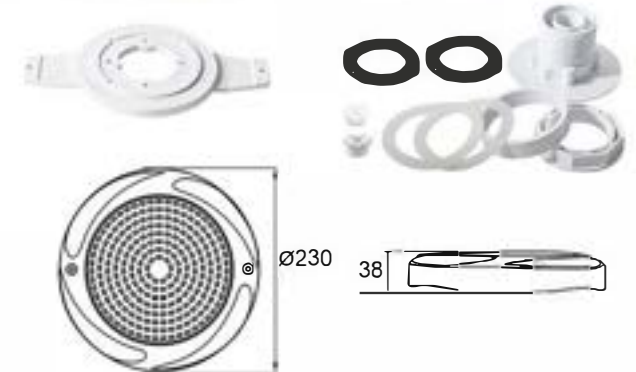


1. Concrete Pool Installation

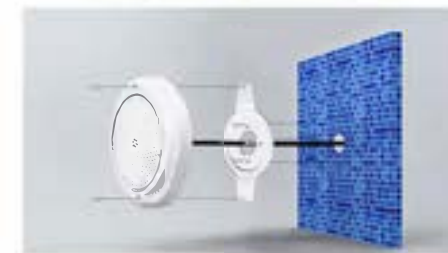

2. Fiberglass Pool Installation

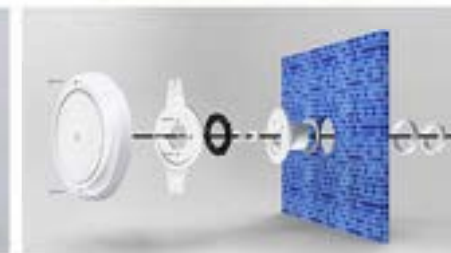

3. Fiberglass&Liner Pool Installation

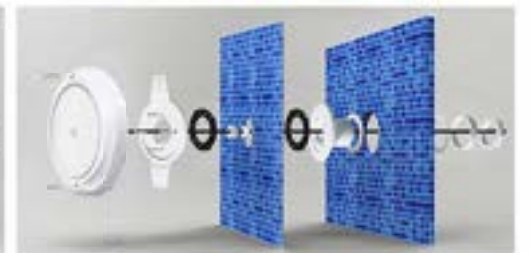

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC230-AP	D230*H38	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			




MODEL:DLX-YC260-2AP


1. Concrete Pool Installation



2. Fiberglass Pool Installation

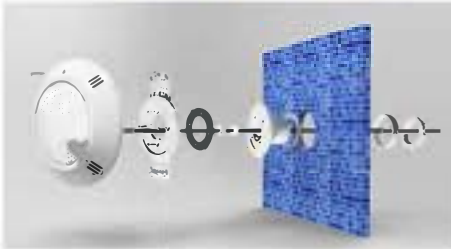

3. Fiberglass&Liner Pool Installation

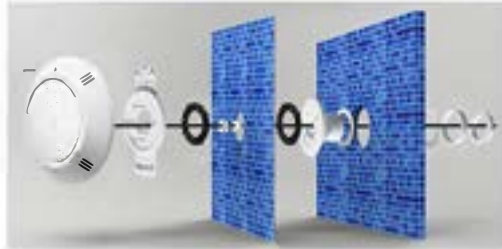

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-2AP	D260*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			



MODEL:DLX-YC295-AP



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC295-AP	D295*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			




UNDER WATER POOL LIGHTING



MODEL:DLX-JM90-AP

MODEL:DLX-JM160-AP

MODEL:DLX-JM230-AP

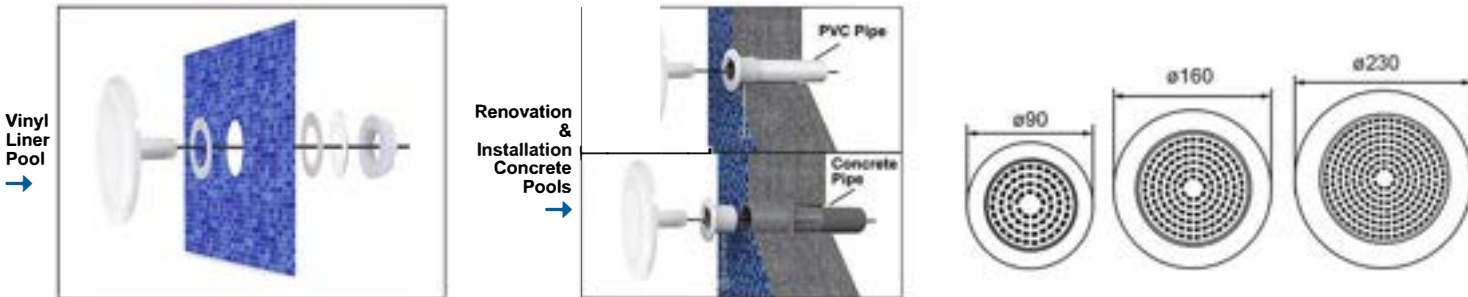

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Liner Pool Light	DLX-JM90-AP	D90*H18	SMD LED	6W	AC12V DC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
	DLX-JM160-AP	D160*H18		12W			
	DLX-JM230-AP	D230*H18		25W			
				35W			




UNDER WATER POOL LIGHTING



MODEL:DLX-JM110-SP

MODEL:DLX-JM160-SP



MODEL:DLX-JM230-SP

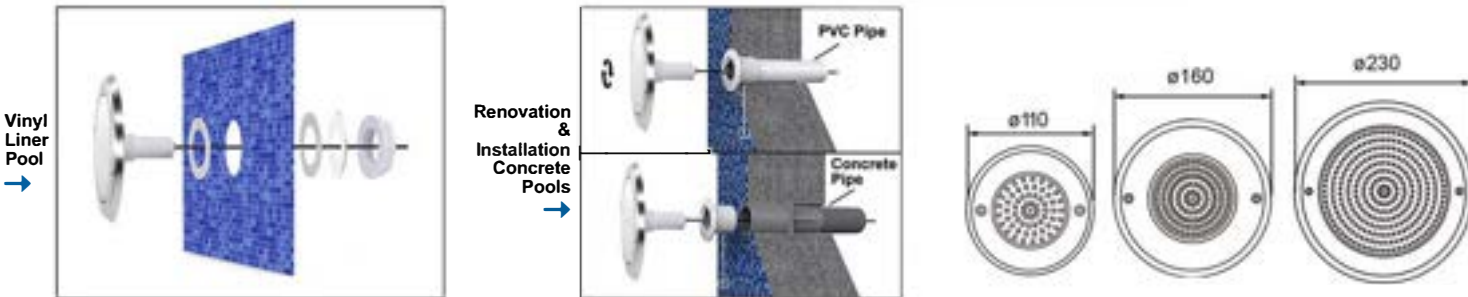

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Liner Pool Light	DLX-JM110-SP	D110*H10	SMD LED	6W	AC12V DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled +PC transparent cover
	DLX-JM160-SP	D160*H10		12W			
	DLX-JM230-SP	D230*H10		25W			
				35W			



MODEL:DLX-JM55-AP

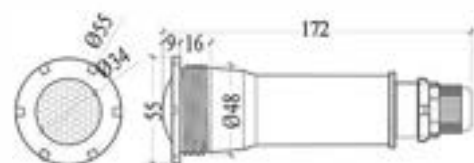

Installation Method 1

Renovation - Concrete Pools



Installation Method 2

Installation - Concrete Pools



Installation Method 3

Installation - Fiberglass Pools
Adapted to Pentair's Niche 620041 / 620093 / 620094



Installation Method 4



Installation - Vinyl Liner Pools
Adapted to Pentair's Niche 620039



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Vinyl Liner Pool Light	DLX-JM55-AP	ø55*H172	SMD LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS
				12W			



MODEL:DLX-JM55-SP

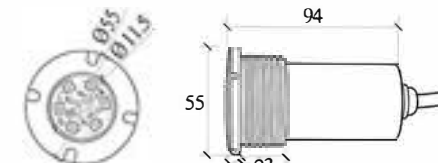

Installation Method 1

Renovation - Concrete Pools



Installation Method 2

Installation - Concrete Pools



Installation Method 3

Installation - Fiberglass Pools
Adapted to Pentair's Niche 620041 / 620093 / 620094



Installation Method 4

Installation - Vinyl Liner Pools
Adapted to Pentair's Niche 620039




Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Vinyl Liner Pool Light	DLX-JM55-SP	ø55*H94	SMD LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless steel
				12W			



MODEL:DLX-GJ110-AP

MODEL:DLX-GJ150-AP

MODEL:DLX- GJ230-AP

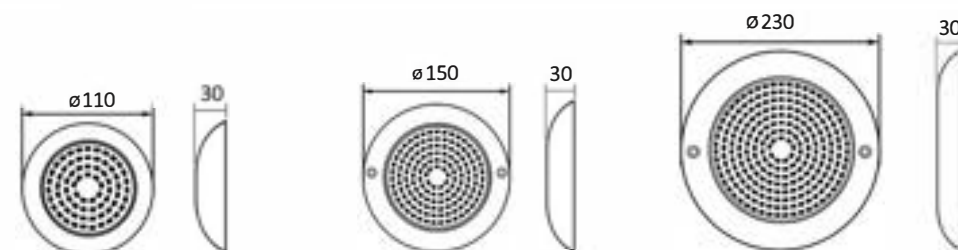


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-GJ110-AP	D110*H30	SMD LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
	DLX-GJ150-AP	D150*H30		12W			
	DLX-GJ230-AP	D230*H30		18W			
				25W			
				35W			



MODEL:DLX-GJ110-SP

MODEL:DLX-GJ145-SP

MODEL:DLX-GJ215-SP

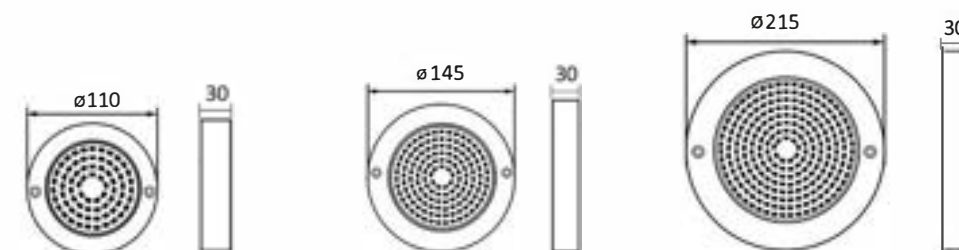

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-GJ110-SP	D110*H30	SMD LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled
	DLX-GJ145-SP	D145*H30		12W			
	DLX-GJ215-SP	D215*H30		18W			
				25W			
				35W			

UNDER WATER POOL LIGHTING




MODEL:DLX-YC300-SP
DLX-YC230-SP

MODEL:DLX-YC300-SP

MODEL:DLX-YC230-SP



MODEL:DLX-YC300-SP



MODEL:DLX-YC230-SP



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC230-SP	D230*H34	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				18W			
	DLX-YC300-SP	D300*H40		12W			
				18W			
				25W			
				35W			


UNDER WATER POOL LIGHTING



MODEL:DLX-YC300-SWP
DLX-YC230-SWP

MODEL:DLX-YC300-SWP

MODEL:DLX-YC230-SWP



MODEL:DLX-YC300-SWP




MODEL:DLX-YC230-SWP



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC230-SWP	D230*H34	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				18W			
	DLX-YC300-SWP	D300*H40		12W			
				18W			
				25W			
				35W			



MODEL:DLX-YC220-AP

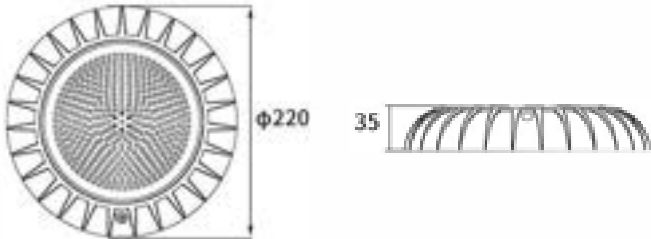

- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy
installation
- 

High
CRI
- 

CE
- 


RoHS
- 

FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC220-AP	D220*H35	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
				35W			



MODEL:DLX-UT100-SP MODEL:DLX-UT100-AP

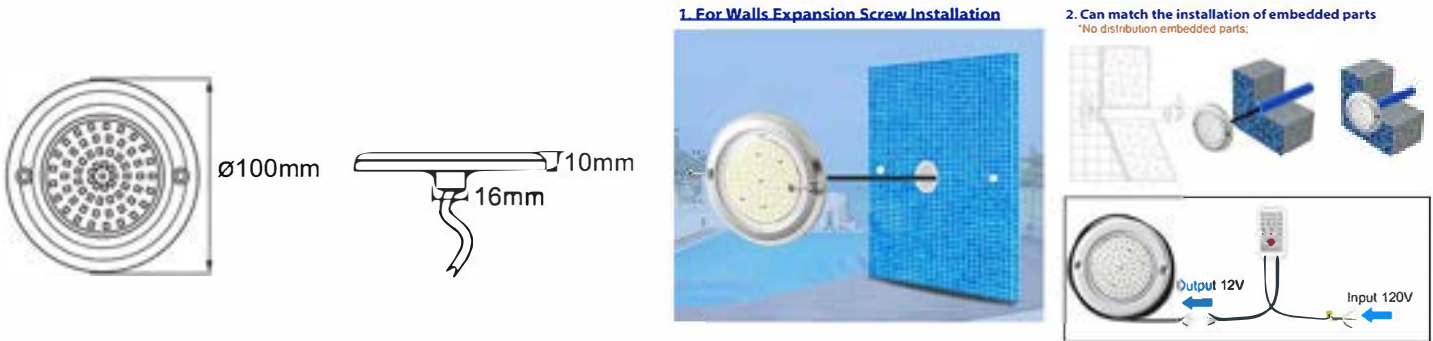

- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy
installation
- 

High
CRI
- 

CE
- 

RoHS
- 

FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-UT100-SP	D100*H10	SMD LED	6W	DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
	DLX-UT100-AP						ABS+Resin filled



MODEL:DLX-YC152-SP

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy installation



High CRI



CE



RoHS



FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC152-SP	D152*H30	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				18W			



MODEL:DLX-YC152-AP

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy installation



High CRI



CE



RoHS



FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC152-AP	D152*H30	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				18W			

UNDER WATER POOL LIGHTING



MODEL:DLX-YC260-2SP

- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy installation
- 


High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-2SP	D260*H40	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				25W			
				35W			

UNDER WATER POOL LIGHTING



MODEL:DLX-YC260-SP
DLX-YC290-SP

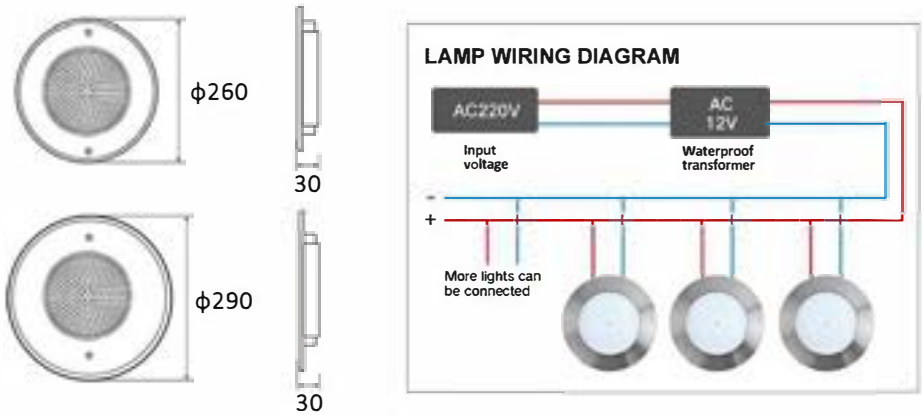

- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy installation
- 


High CRI
- 
- 
- 

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC260-SP	D260*H30	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled
				25W			
	DLX-YC290-SP	D290*H30		35W			

UNDER WATER POOL LIGHTING



MODEL:DLX-UT90-AP
 MODEL:DLX-UT160-AP
 MODEL:DLX-UT230-AP

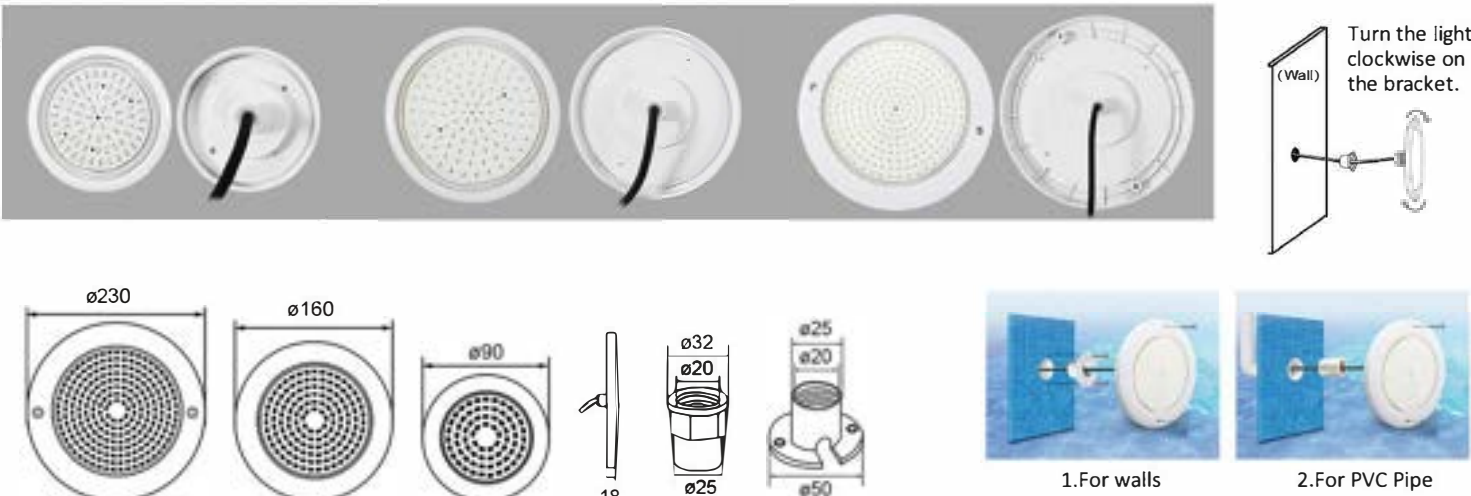

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-UT90-AP	D90*H18	SMD LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
	DLX-UT160-AP	D160*H18		12W			
	DLX-UT230-AP	D230*H18		18W			
				25W			
				35W			



UNDER WATER POOL LIGHTING



MODEL:DLX-UT110-4SP

MODEL:DLX-UT160-4SP

MODEL:DLX-UT230-4SP

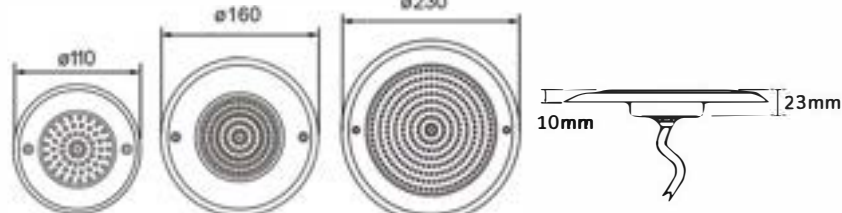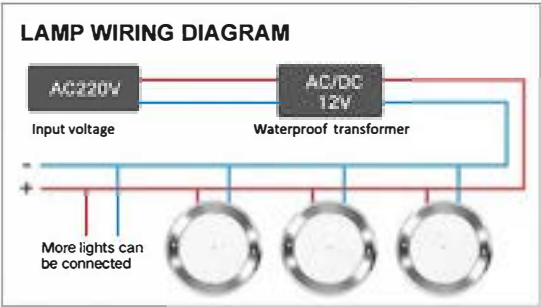

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT110-4SP	D110*H23	SMD LED	6W	AC12V DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled +PC transparent cover
	DLX-UT160-4SP	D160*H23		12W			
	DLX-UT230-4SP	D230*H23		18W			
				25W			
				35W			

UNDER WATER POOL LIGHTING



MODEL:DLX-UT110-3SP

MODEL:DLX-UT160-3SP

MODEL:DLX-UT230-3SP

- Only 10MM thickness.
- Marine Grade stainless steel.
- Resin Filled, 100% Waterproof.
- Multicolor with remote control, Animation modes.
- With Tuya module controller, which support smart app wift control, Music Control, Voice control.

Installation Steps

1. Screw the lamp body to the wall of the sink.
2. The use of underwater cable gland is strongly recommended for connecting wire to DC12V transformer without opening (lamps cannot be directly connected to 110V or 220V power supply)



UNDER WATER POOL LIGHTING





MODEL:DLX-UT110-3SP



MODEL:DLX-UT160-3SP



MODEL:DLX-UT230-3SP

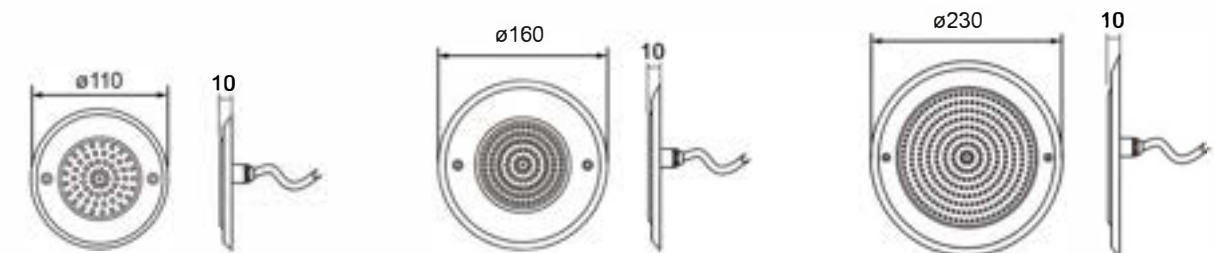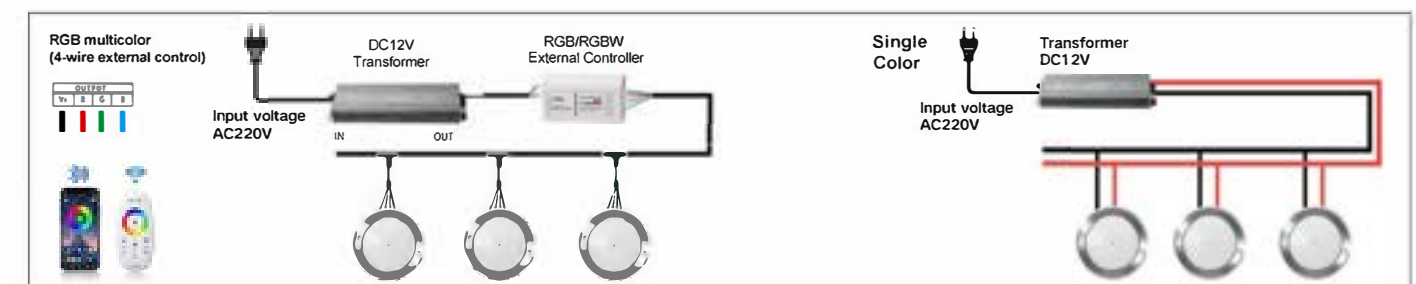


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT110-3SP	D110*H10	SMD LED	6W	DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled +PC transparent cover
	DLX-UT160-3SP	D160*H10		12W			
				18W			
	DLX-UT230-3SP	D230*H10		25W			
				35W			

UNDER WATER POOL LIGHTING




MODEL:DLX-UT250-SP

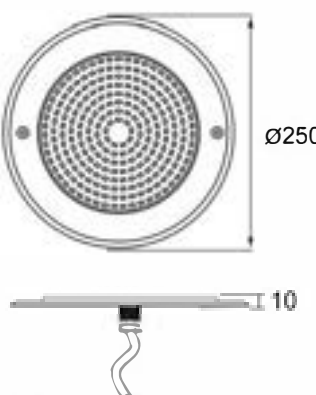


Installation Steps

- Screw the lamp body to the wall of the sink.
- The use of underwater cable gland is strongly recommended for connecting wire to DC12V transformer without opening (lamps cannot be directly connected to 110V or 220V power supply)

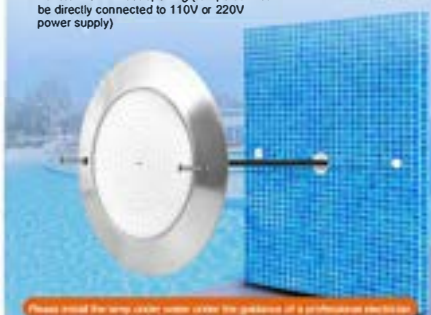


Wiring diagram

RGB multicolor (4-wire external control)

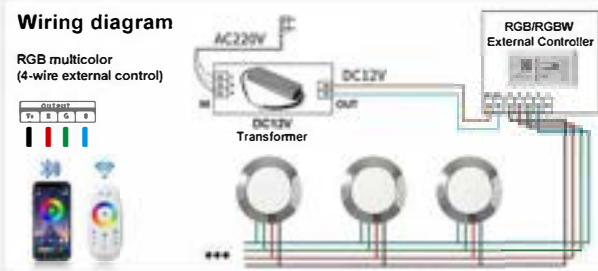

Single Color

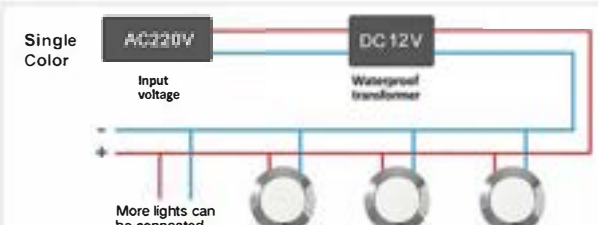

Lamp lifetime ≥50,000H

Working temperature -20°C~40°C

Waterproof IP68

Easy installation

High CRI

CE

RoHS


FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT250-SP	D250*H10	SMD LED	18W	DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled +PC transparent cover
				25W			
				35W			

UNDER WATER POOL LIGHTING



MODEL:DLX-UT250-2SP

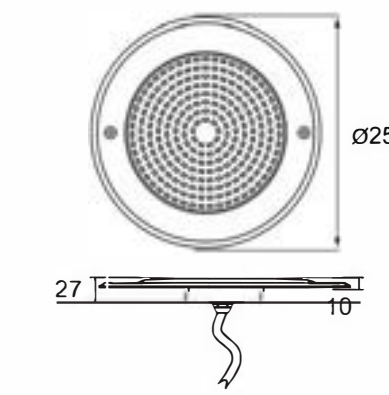


Installation Steps

- Drill a hole.
- Screw the lamp body to the wall of the sink. Fix the screws.



LAMP WIRING DIAGRAM

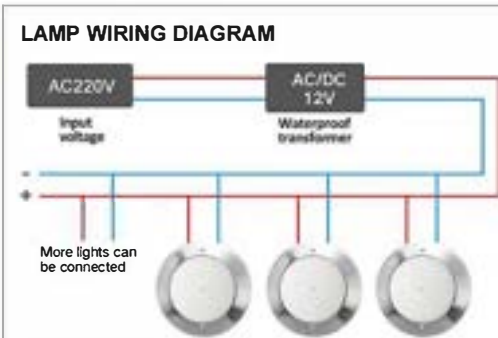

Lamp lifetime ≥50,000H

Working temperature -20°C~40°C

Waterproof IP68

Easy installation

High CRI

CE

RoHS

FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT250-2SP	D250*H27	SMD LED	18W	AC12V DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304+Resin filled +PC transparent cover
				25W			
				35W			



MODEL:DLX-UT110-SP


MODEL:DLX-UT160-SP

MODEL:DLX-UT230-SP

MODEL:DLX-UT280-SP



- Only 7.5MM thickness.
- Marine Grade stainless steel.
- Resin Filled, 100% Waterproof.
- Multicolor with remote control, Animation modes.
- With Tuya module controller,which support smart app wift control,Music Control, Voice control.

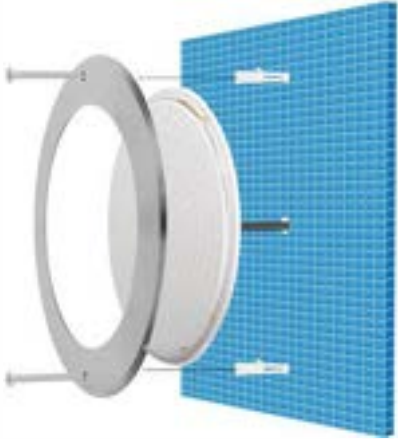

Multi Control Methods

16 Millions of colors to choose

Dynamic mode Static mode

Timing setting

Group contro

WiFi wireless control support long-range control


01 2.4G RF remote control


02 Smart control of mobile app

03 Music Sound Control

04 Voice control



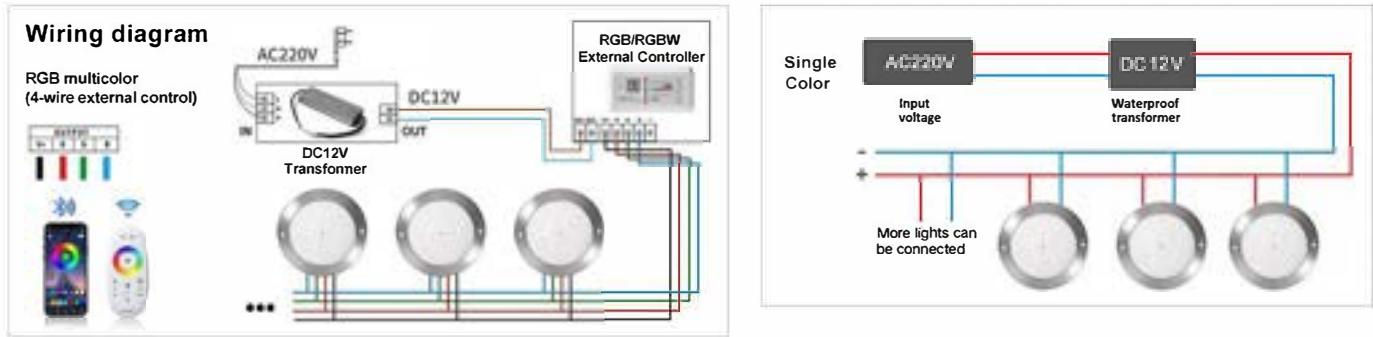

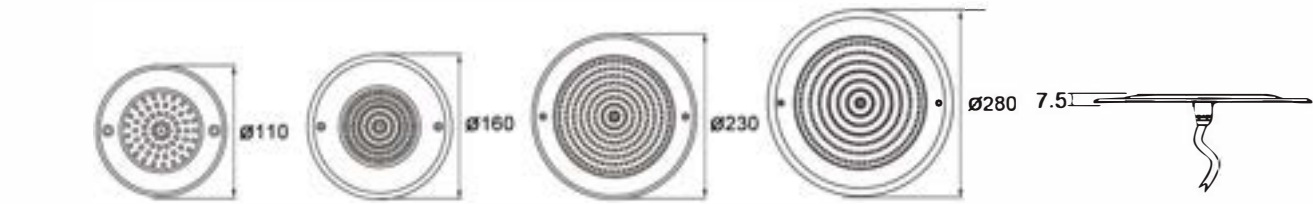

Lamp lifetime ≥50,000H

Working temperature -20°C~40°C

Waterproof IP68

Easy installation

High CRI

CE

Ro

HS

FC

Product	Model	Size(mm)	Power	Light Source	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT110-SP	D110*H7.5	6W	SMD LED	DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled +PC transparent cover
	DLX-UT160-SP	D160*H7.5	12W				
	DLX-UT230-SP	D230*H7.5	18W				
			25W				
	DLX-UT280-SP	D280*H7.5	35W				
			18W				
			25W				
			35W				




MODEL:DLX-UT230-2SP

- 1 Drill a hole.
- 2 Screw the lamp body to the wall of the sink, Fix the screws.

The use of underwater cable gland is strongly recommended for connecting wire to AC12V transformer (lamps cannot be directly connected to 110V or 220V power supply)



LAMP WIRING DIAGRAM

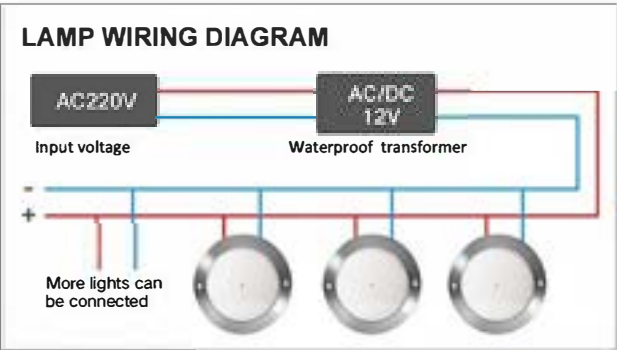

Only 7.5MM thickness

Does not take up space, just stick to the pool wall







Lamp lifetime
≥50,000H




Working temperature
-20°C~40°C



Waterproof
IP68



Easy installation



High CRI



CE



RoHS





FC

Product	Model	Size(mm)	Power	Light Source	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT110-2SP	D110*H20.5	6W	SMD LED	AC12V DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 +Resin filled +PC transparent cover
	DLX-UT160-2SP	D160*H20.5	12W				
			18W				
	DLX-UT230-2SP	D230*H20.5	25W				
			35W				
			18W				
	DLX-UT280-2SP	D280*H20.5	25W				
			35W				




MODEL:DLX-UT250-AP

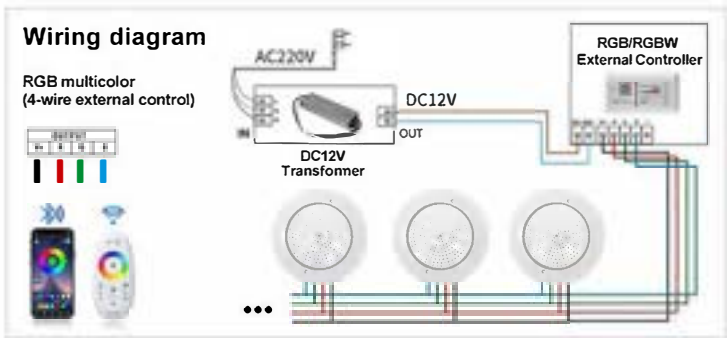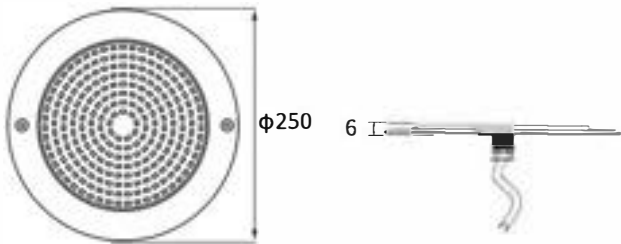

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Ultra-thin Resin LED Swimming Pool Light	DLX-UT250-AP	D250*H6	SMD LED	12W	DC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				18W			
				25W			
				35W			



MODEL:DLX-YC295-A

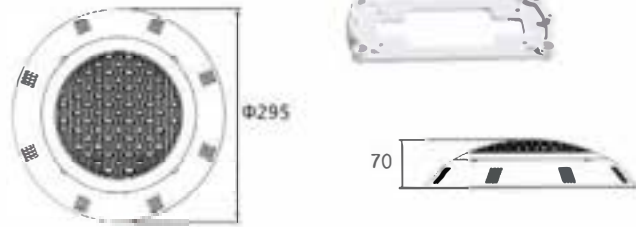

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC295-A	D295*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	ABS+PC
				18W			
				24W			
				25W			
				35W			
				45W			



MODEL:DLX-YC260-A

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy
Installation



High
CRI



CE



RoHS



FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC260-A	D260*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light	ABS+PC
				18W			
				24W			
				25W		/	
				35W			
				45W			



MODEL:DLX-YC295-2A
DLX-YC230-2A

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy
Installation



High
CRI



CE




RoHS





FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material	
Wall mounted pool lamp	DLX-YC230-2A	D230*H48	1PCS/W High Power LED / SMD LED	6W	AC12V	Irradiation long distance and Concentrated light	ABS+PC	
				9W				
				12W				
	DLX-YC295-2A	D295*H70		12W		/		Irradiation area widen The light is downy and No dazzling
				18W				
				24W				
				25W				
				35W				
				45W				


UNDER WATER POOL LIGHTING



MODEL: DLX-YC180-S

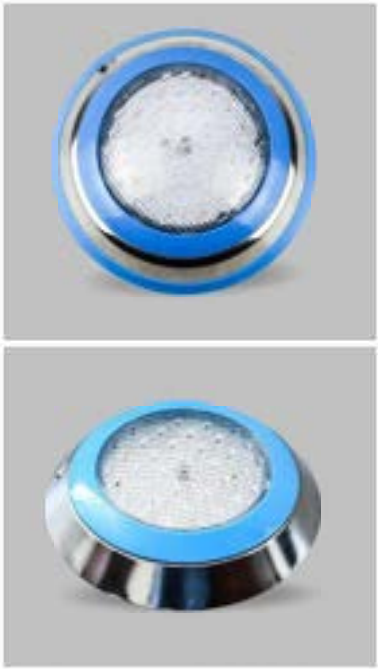


MODEL: DLX-YC230-S

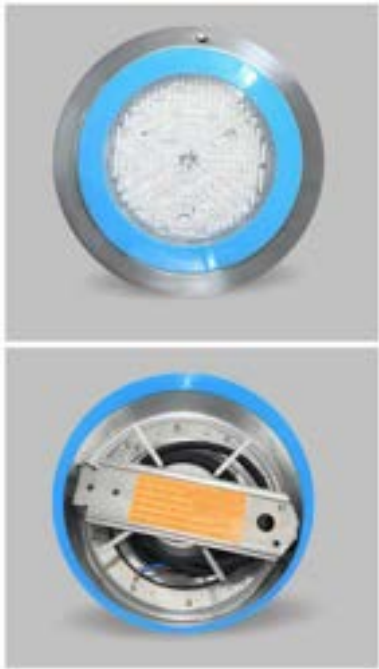

MODEL: DLX-YC300-S



MODEL: DLX-YC180-SW



MODEL: DLX-YC230-SW



MODEL: DLX-YC300-SW

UNDER WATER POOL LIGHTING




Product	Model	Size(mm)	Power	Light Source	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC180-S(Blue) DLX-YC180-SW (White)	D180*H45	3W	1PCS/W High Power LED / SMD LED	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316
			6W				
			9W				
	DLX-YC230-S(Blue) DLX-YC230-SW (White)	D230*H48	6W				
			9W				
			12W				
			18W				
	DLX-YC300-S(Blue) DLX-YC300-SW (White)	D300*H70	18W				
			24W				
			25W				
			35W				
			36W				
			45W				
			18*3W				





MODEL:DLX-YC230-A

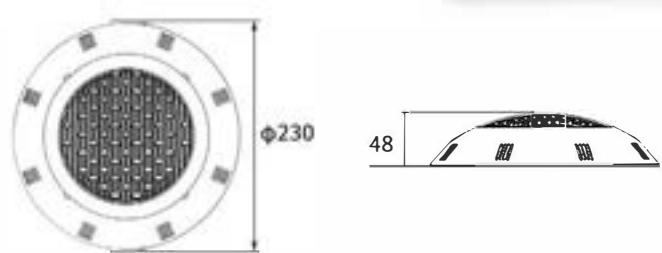

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy
installation



High
CRI



CE



RoHS




FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
wall mounted pool lamp	DLX-YC230-A	D230*H48	LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+PC
				9W			
				12W			
				18W			





MODEL:DLX-YC230-3A

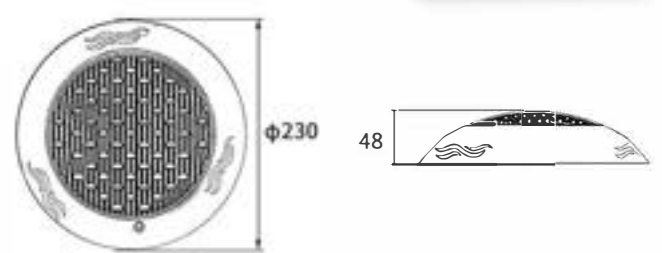

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy
installation



High
CRI



CE



RoHS



FCC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
wall mounted pool lamp	DLX-YC230-3A	D230*H48	LED	6W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+PC
				9W			
				12W			
				18W			



MODEL:DLX-YC292-A

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy installation



High CRI







Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC292-A	D292*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light	ABS+PC
				18W			
				24W			
				25W		/ Irradiation area widen The light is downy and No dazzling	
				35W			
				12*3W			
				45W			



MODEL:DLX-YC280-A

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy installation



High CRI








Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Wall mounted pool lamp	DLX-YC280-A	D280*H70	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light	ABS+PC
				18W			
				24W			
				25W		/ Irradiation area widen The light is downy and No dazzling	
				35W			
				12*3W			
				45W			

UNDER WATER POOL LIGHTING



MODEL:DLX-QR257-S

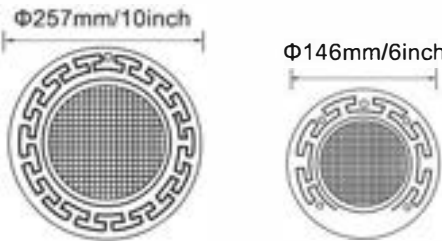


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Wall Mounted LED Pool Light	DLX-QR146-SP	Φ146	SMD LED	6W 9W	AC/DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316
	DLX-QR146-S	Φ146		12W 18W			
	DLX-QR257-SP	Φ257		25W 35W			
	DLX-QR257-S	Φ257		40W 45W			

UNDER WATER POOL LIGHTING



MODEL:DLX-QR257-2S

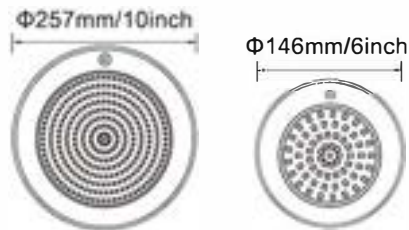

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Wall Mounted LED Pool Light	DLX-QR146-2SP	Φ146	SMD LED	6W 9W	AC/DC12V	Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316
	DLX-QR146-2S	Φ146		12W 18W			
	DLX-QR257-2SP	Φ257		25W 35W			
	DLX-QR257-2S	Φ257		40W 45W			




MODEL:DLX-QR146-SS

MODEL:DLX-QR146-SA



Stainless Steel Niche

ABS Niche

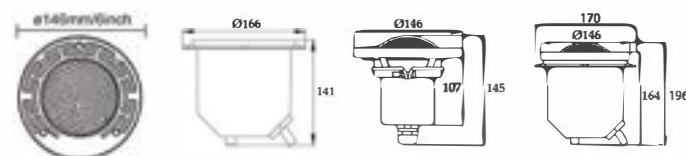

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR146-SA	D146*H145	1PCS/W High Power LED / SMD LED	6W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 + Stainless Steel/ ABS Niche
				9W			
				12W			
	DLX-QR146-SS						



MODEL:DLX-QR257-SS


MODEL:DLX-QR257-SA



Stainless Steel Niche




ABS Niche

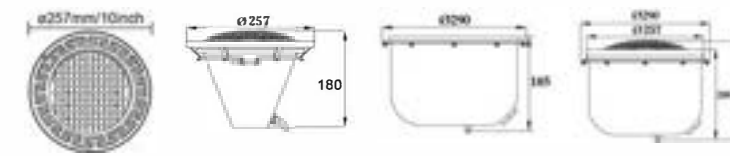

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR257-SA	D257*H180	1PCS/W High Power LED / SMD LED	18W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 + Stainless Steel/ ABS Niche
				24W			
				25W			
				35W			
				45W			
	DLX-QR257-SS						




MODEL:DLX-QR95-A

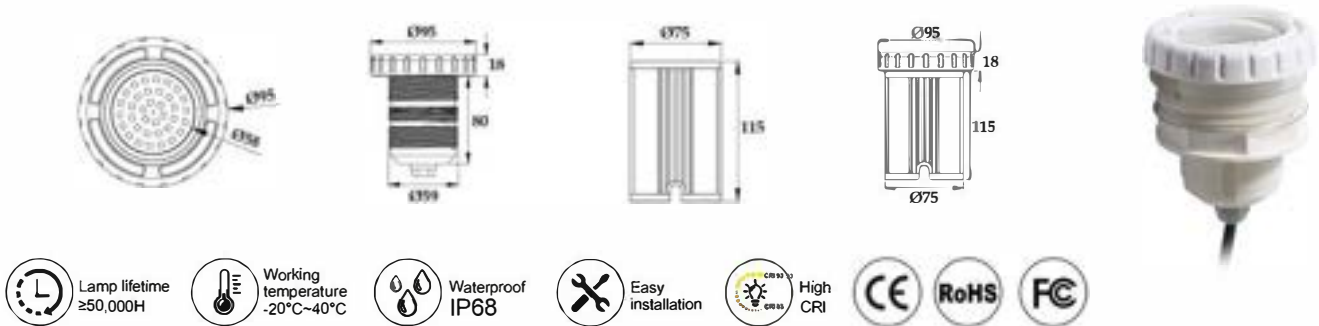

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Body Material
Embedded Pool Light	DLX-QR95-A	D95*H115	1PCS/W High Power LED / SMD LED	3W	AC12V	ABS+PC embedded parts
				6W		
				9W		



MODEL:DLX-QR95-2A

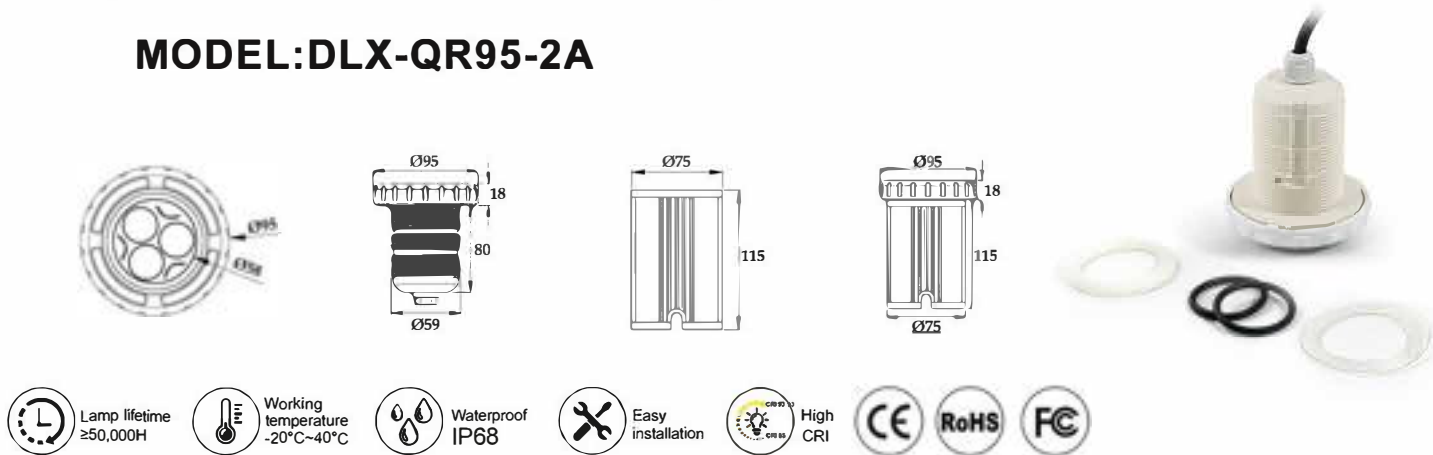


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Body Material
Embedded Pool Light	DLX-QR95-2A	D95*H115	1PCS/W High Power LED / SMD LED	3W	AC12V	ABS+PC embedded parts
				6W		
				9W		



MODEL:DLX-QR195-S

MODEL:DLX-QR270-S

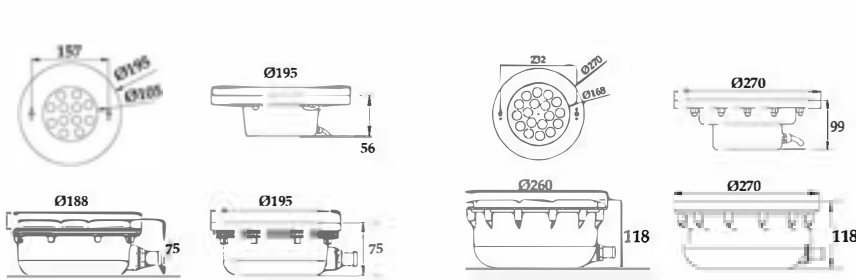

MODEL:DLX-QR195-S

MODEL:DLX-QR270-S



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR195-S	D195*H75	1PCS/W High Power LED	6W / 9W 12W / 18W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	Stainless Steel 304/316 + ABS embedded parts
	DLX-QR270-S	D270*H118	/ SMD LED	18W / 24W 25W / 35W 12*3W			



MODEL:DLX-QR290-AS

MODEL:DLX-QR290-A



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR290-A	D290*H168	1PCS/W High Power LED / SMD LED	18W 24W 25W 35W 45W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	ABS/ Stainless Steel Cover Plate + ABS embedded parts
	DLX-QR290-AS						



MODEL:DLX-QR280-AP

MODEL:DLX-QR280-2A



- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy installation



High CRI



CE



RoHS




FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR280-AP	D280*H160	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				25W			
	DLX-QR280-2A			35W			



MODEL:DLX-QR280-A

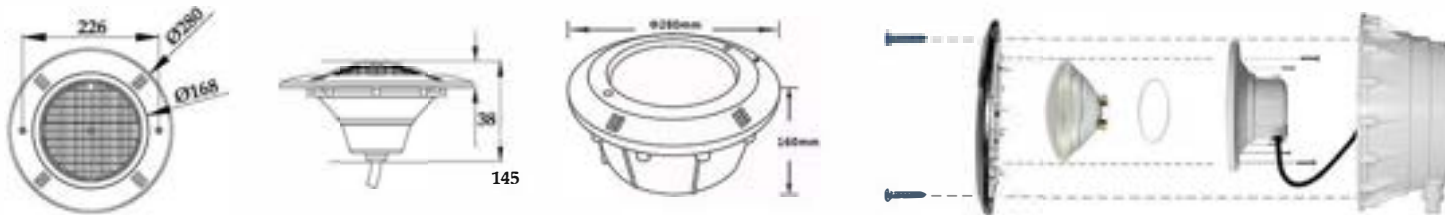

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy installation



High CRI



CE



RoHS




FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR280-A	D280*H160	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Glass
				18W			
				25W			
				35W			
				45W			



MODEL:DLX-QR160-A

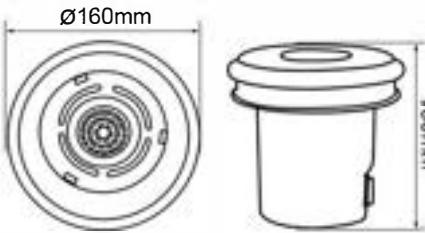

- Lamp lifetime
≥50,000H

Working temperature
-20°C~40°C

Waterproof
IP68

Easy
installation

High
CRI

CE

RoHS


FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
Embedded Pool Light	DLX-QR160-A	D160*H150	SMD LED	3W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				6W			
				9W			



MODEL:DLX-QR282-AS

MODEL:DLX-QR282-A

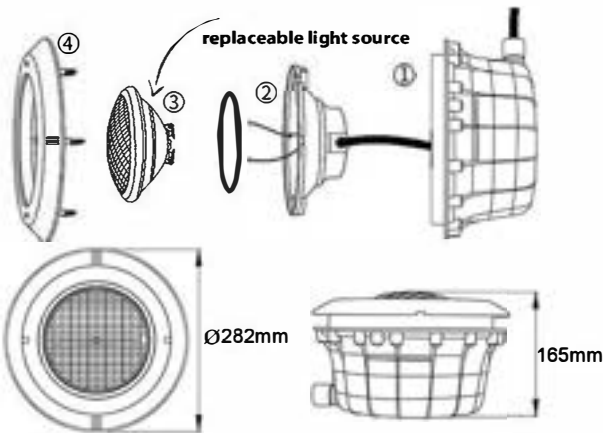

- Lamp lifetime
≥50,000H

Working temperature
-20°C~40°C

Waterproof
IP68

Easy
installation

High
CRI

CE

RoHS

FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material		
Embedded Pool Light	DLX-QR282-A	D282*H165	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS/ Stainless Steel Cover Plate + ABS embedded parts		
				18W					
	DLX-QR282-AS			25W					
	35W								
	45W								

UNDER WATER POOL LIGHTING



MODEL:DLX-YC220-5AP



- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy installation
- 

High CRI
- 

CE
- 

RoHS
- 

FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled LED Pool Light	DLX-YC140-5AP	D140*H27	SMD LED	10W	Input : AC100V ~240V Output : DC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
	DLX-YC220-5AP	D220*H40		20W			

UNDER WATER POOL LIGHTING



MODEL:DLX-YC180-3AP



- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy installation
- 

High CRI
- 

CE
- 


RoHS
- 

FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled LED Pool Light	DLX-YC180-3AP	D180*H40	SMD LED	10W	Input : AC100V ~240V Output : DC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				20W			



MODEL:DLX-YC230-P56

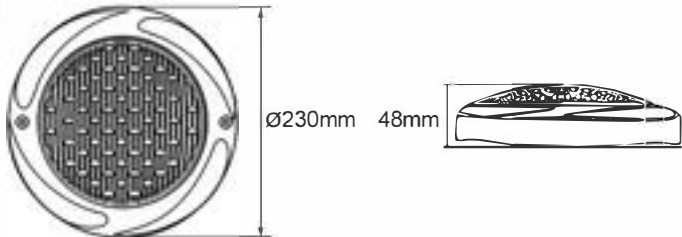

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy
installation



High
CRI



CE



RoHS



FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled Wall Mounted LED Pool Light	DLX-YC230-P56	D230*H48	SMD LED	12W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+Resin filled
				18W			
				25W			
				35W			



- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP68



Easy
installation



High
CRI



CE



RoHS




FC

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
Resin Filled LED Pool Light	DLX-P56-AP	D177*H30	SMD LED	18W	AC12V	Irradiation area widen The light is downy and No dazzling	ABS+pctransp arency cover
				25W			
				35W			



MODEL:DLX-P56-TG

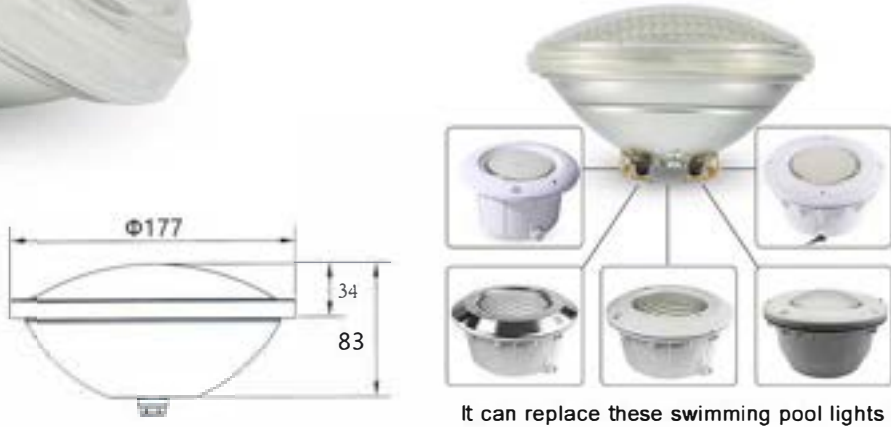


It can replace these swimming pool lights



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-TG	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light	Glass
				18W			
				24W			
				25W		Irradiation area widen The light is downy and No dazzling	
				35W			
				45W			





MODEL:DLX-P56-SS



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-SS	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	Stainless steel 304/316
				18W			
				24W			
				25W			
				35W			
				45W			




MODEL:DLX-P56-G



Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material
P56 Pool Light	DLX-P56-G	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light / Irradiation area widen The light is downy and No dazzling	Glass
				18W			
				24W			
				25W			
				35W			
				45W			




MODEL:DLX-P56-A

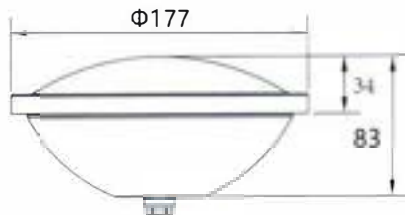

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material	
P56 Pool Light	DLX-P56-A	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light	ABS	
				18W				
				24W				
				25W		Irradiation area widen The light is downy and No dazzling		
				35W				
				45W				



MODEL:DLX-P56-S

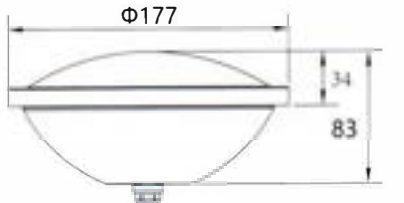


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Lighting effects	Body Material	
P56 Pool Light	DLX-P56-S	D177*H83	1PCS/W High Power LED / SMD LED	12W	AC12V	Irradiation long distance and Concentrated light	Stainless Steel 304/316	
				18W				
				24W				
				25W		Irradiation area widen The light is downy and No dazzling		
				35W				
				45W				

UNDER WATER POOL LIGHTING

UNDER WATER POOL LIGHTING




MODEL:DLX-P38-3A

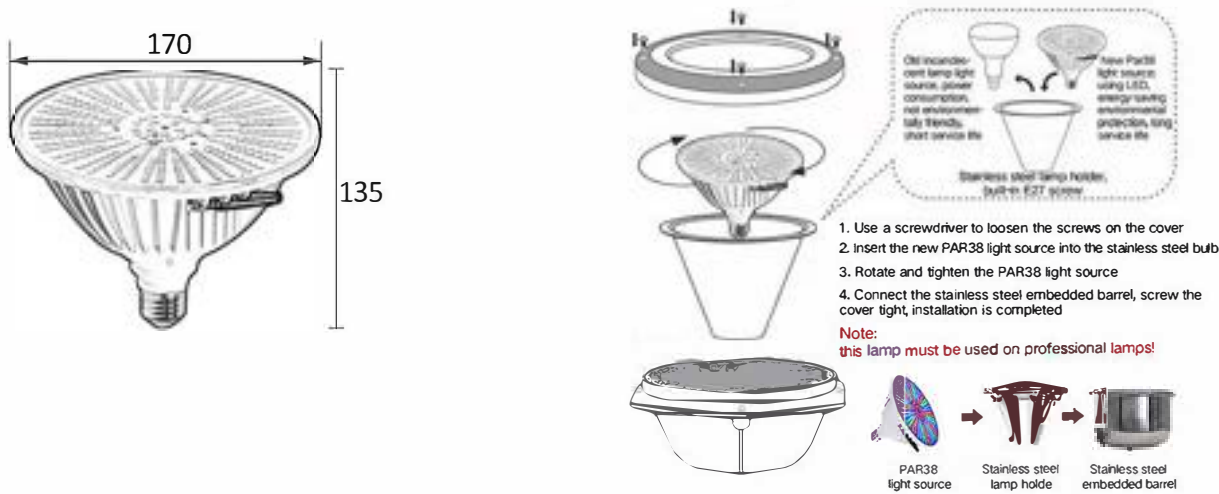


Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
P38 Pool Light	DLX-P38-3A	D170*H135	SMD LED	40W	12V/120V	Irradiation area widen The light is downy and No dazzling	ABS



MODEL:DLX-P38-AS

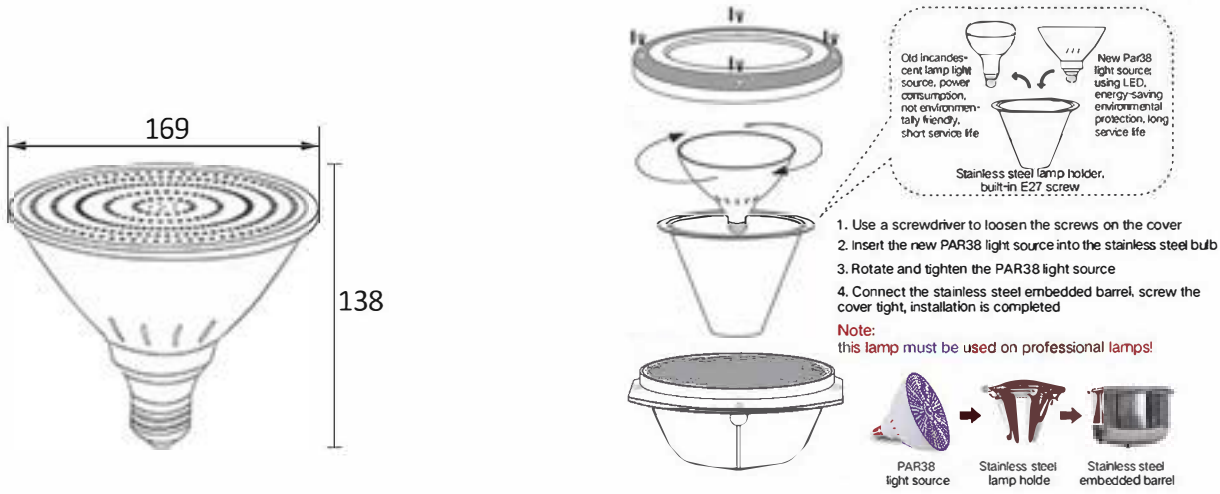

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
P38 Pool Light	DLX-P38-AS	D169*H138	SMD LED	18W	12V/120V	Irradiation area widen The light is downy and No dazzling	ABS
				25W			
				40W			

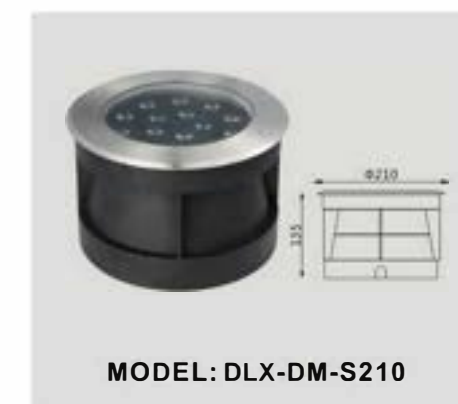



UNDER WATER POOL LIGHTING

UNDER WATER POOL LIGHTING



MODEL: DLX-SD-A82



MODEL: DLX-SD-A120



MODEL: DLX-SD-A145



MODEL: DLX-SD-A145



MODEL: DLX-SD-A160



MODEL: DLX-SD-A190




MODEL: DLX-SD-A210




MODEL: DLX-SD-A230




MODEL: DLX-PQ-L110




MODEL: DLX-PQ-L130





MODEL: DLX-PQ-L160



MODEL: DLX-PQ-L180



MODEL: DLX-PQ-L200

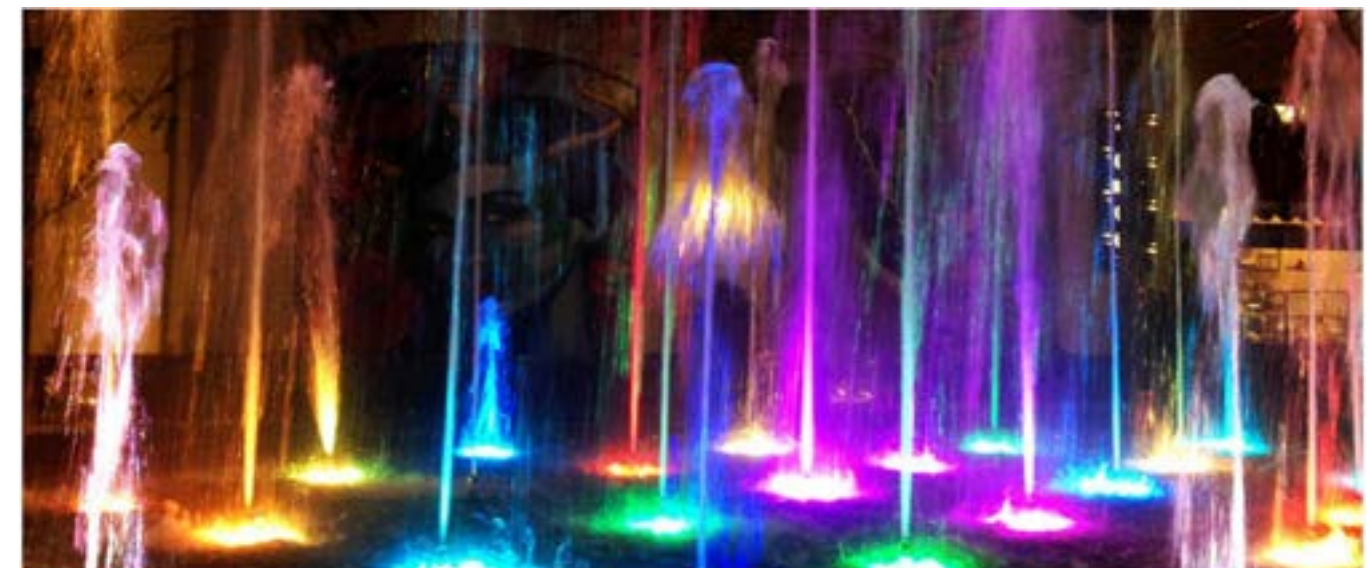





MODEL:DLX-PQ-A163


TWO

nozzles are optional

Mushroom shaped fountain and champagne bubble shape



MODEL:DLX-PQ-A180

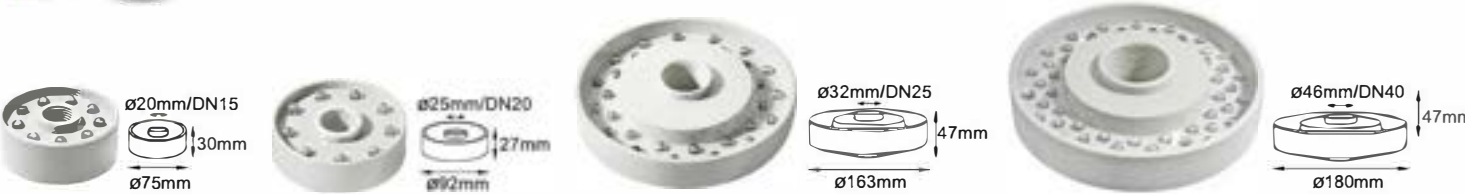

DLX-PQ-A75

DLX-PQ-A92

DLX-PQ-A163

DLX-PQ-A180



Product	Model	Size(mm)	Middle Hole Dia	Power	Light Source	Working Voltage	Luminous color	Body Material
LED Fountain light	DLX-PQ-A75	D75*H30	20mm / DN15	3W	SMD LED	AC12V	Irradiation long distance and Concentrated light	ABS light + Stainless Steel Nozzle
	DLX-PQ-A92	D92*H27	25mm / DN20	3W				
	DLX-PQ-A163	D163*H47	32mm / DN25	9W				
	DLX-PQ-A180	D180*H47	46mm / DN40	12W				



MODEL:DLX-TQ-S01

MODEL:DLX-TQ-S02



Product	Model	Size(mm)	Water Outlet	Water Inlet	Flow Rate (M3/H)	Pump head	Jet Height	Spa	Power	Voltage	LED Color	Body Material
Jumping jet fountain	DLX-TQ-S01 DLX-TQ-S02	D160*H250	8mm	DN20	2	4	1.2	1	3W	Output: AC/DC 24V Input: AC100-240V	White Warm white Yellow RED Green Blue RGB	Stainless steel
		D219*H380	12mm	DN25	4	10	2.5	2	10W			
		D273*H400	15mm	DN40	5	12	4.5	2.5	10W			
		D325*H450	18mm	DN40	6	15	8	3	10W			



MODEL:JKD-SD-E235


DLX-SD-E235

DLX-SD-E192

DLX-SD-E160

DLX-SD-E135

DLX-SD-E122

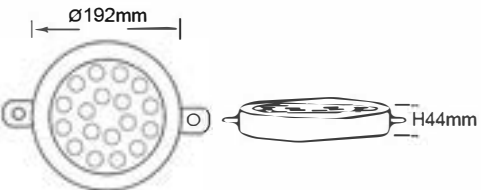

Installation Steps

1 Screw the lamp body to the wall of the sink

2 The use of underwater cable gland is strongly recommended for connecting wire to AC12V transformer without opening (lamps cannot be directly connected to 110V or 220V power supply)

*Please install the lamp under water under the guidance of a professional electrician

Lamp lifetime ≥50,000H

Working temperature -20°C~40°C

Waterproof IP68

Easy installation

High CRI

CE

RoHS

FC

Product	Model	Size(mm)	Power	Light Source	Working Voltage	Luminous color	Body Material
Surface mounted LED Underwater Light	DLX-SD-E122	D122*H44	9W	SMD LED	AC12V	Irradiation long distance and Concentrated light	Stainless steel
	DLX-SD-E135	D135*H44	12W				
	DLX-SD-E160	D160*H44	15W				
	DLX-SD-E192	D192*H44	18W				
	DLX-SD-E235	D235*H44	24W				

74



MODEL:DLX-DX-SL300

300mm

500mm

600mm

1000mm

90mm

90mm

110mm

110mm

1000mm

Two installation methods

Suitable for different site needs

surface mounted

recessed mounted

Lamp lifetime ≥50,000H

Working temperature -20°C~40°C

Waterproof IP68

Easy installation

High CRI

CE

RoHS

FC


Product	Model	Size(mm)	Power	Light Source	Working Voltage	Luminous color	Body Material
Surface mounted Embedded mounted LED Underwater Light	DLX-DX-SL300	L300*W90*110	6W/9W	SMD LED	AC12V AC24V	Irradiation long distance and Concentrated light	Stainless steel
	DLX-DX-SL500	L500*W90*110	12W				
	DLX-DX-SL600	L600*W90*110	15W				
	DLX-DX-SL1000	L1000*W90*110	18W/24W/36W				

75

UNDER WATER POOL LIGHTING



MODEL:DLX-DD01

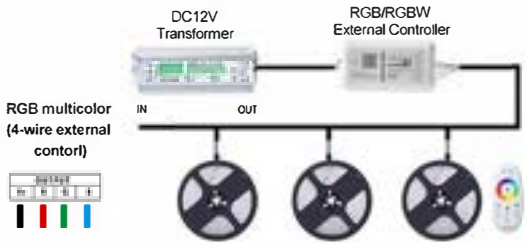

- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy
installation
- 


High
CRI
- 
- 
- 

Product	Model	Size(mm)	Length(m)	Power	Working Voltage	Cutting method	LED Chips per meter	Waterproof grade	Body Material
Silicone soft Underwater LED strip light	DLX-DD01	Wide:12 Thick:5.5	12V: 5 Meters/roll 24V: 10 Meters/roll	12W/m	DC12V DC24V	5cm one cut	2835 SMD : 120 Chips/meter 5050 SMD: 60 Chips/meter	IP68	Silica gel

UNDER WATER POOL LIGHTING



MODEL:DLX-DD02

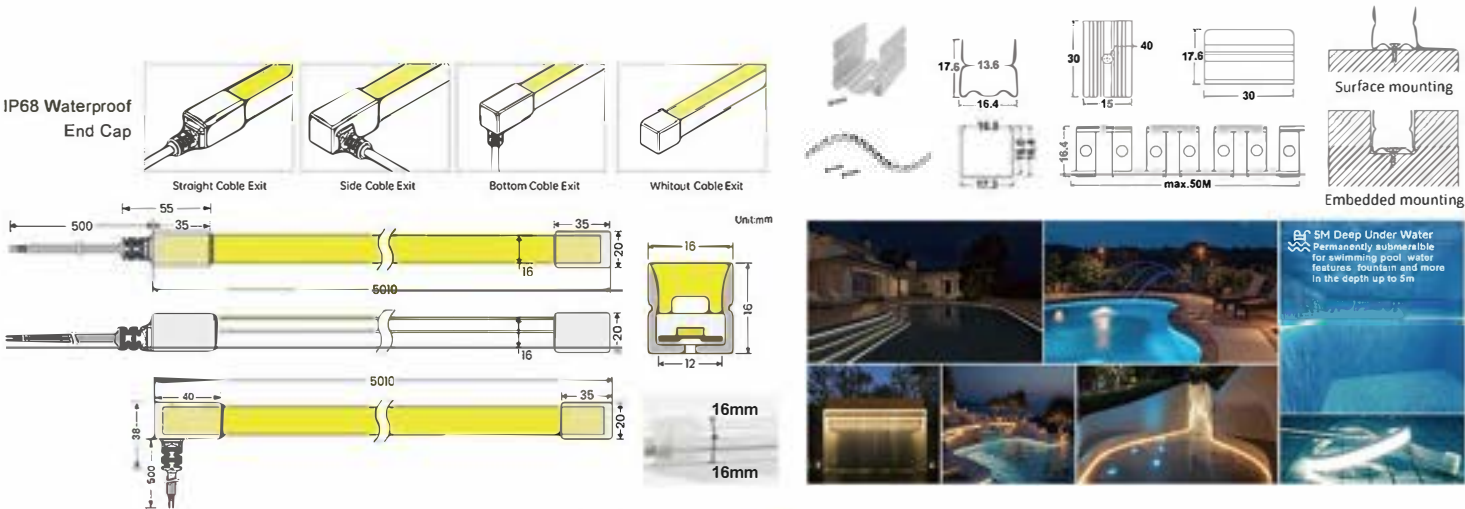

- 

Lamp lifetime
≥50,000H
- 

Working temperature
-20°C~40°C
- 

Waterproof
IP68
- 

Easy
installation
- 

High
CRI
- 
- 
- 

Product	Model	LED Color	Size(mm)	Length(m)	Power	Working Voltage	Min . Cutting	LED Chips per meter	Body Material
Underwater IP68 LED Neon Flex Strip	DLX-DD02	 3000K	Wide:16 Thick:16	5 Meters/roll	12W/m	DC12V DC24V	50mm	2835 SMD : 120 Chips/meter	Silica gel
		 4000K					50mm		
		5000K					50mm		
		 RGB					71.4mm	5050RGB/RGBW SMD: 84 Chips/meter	
		 RGBW					71.4mm		



13W

ø25*H172mm



13W

ø28*H175mm



100W

ø45*H225mm



200W

ø55*H250mm



300W

ø80*H410mm



Product	Model	Power	Working Voltage	Emitting Color	Wire Length	Type of diode	Waterproof grade	Body Material
Underwater Submersible Night Boat Fishing Lights	DLX-JY	13W	AC/DC 12-24V	White Green Blue Yellow RED	5m	SMD LED	IP68	ABS+ PC +Stainless steel
		20W						
		30W						
		60W						
		100W						
		200W						
		300W						
		400W						
		500W						

What makes our products worth using?



Customized Services

Light Color / Cable Length
Material / size / Wattage
Packaging / Voltage
Custom Color / Custom LOGO
Custom Label / Custom Packaging



High quality LEDs

Well-known brands LED beads.
High color rendering index.
Excellent color consistency. Even underwater, ultra-low light decay rate. Long-term brightness.



OEM/ODM

We provide professional personalized customization and offer one-stop solutions to your waterproof challenges for pool and underwater lighting.



High protection

Corrosion resistant, wear resistant, chlorine resistant, UV resistant, insulated and explosion-proof, with stable and reliable performance.



Factory Direct Supply


5000m² self-owned factory, 1000+molds and patent design. Sales to 120+ countries around the world,no middlemen.



After-Sales Service




24 hours online after -sales customer service,online guidance installation and use,sent technical personnel to local guidance, etc.



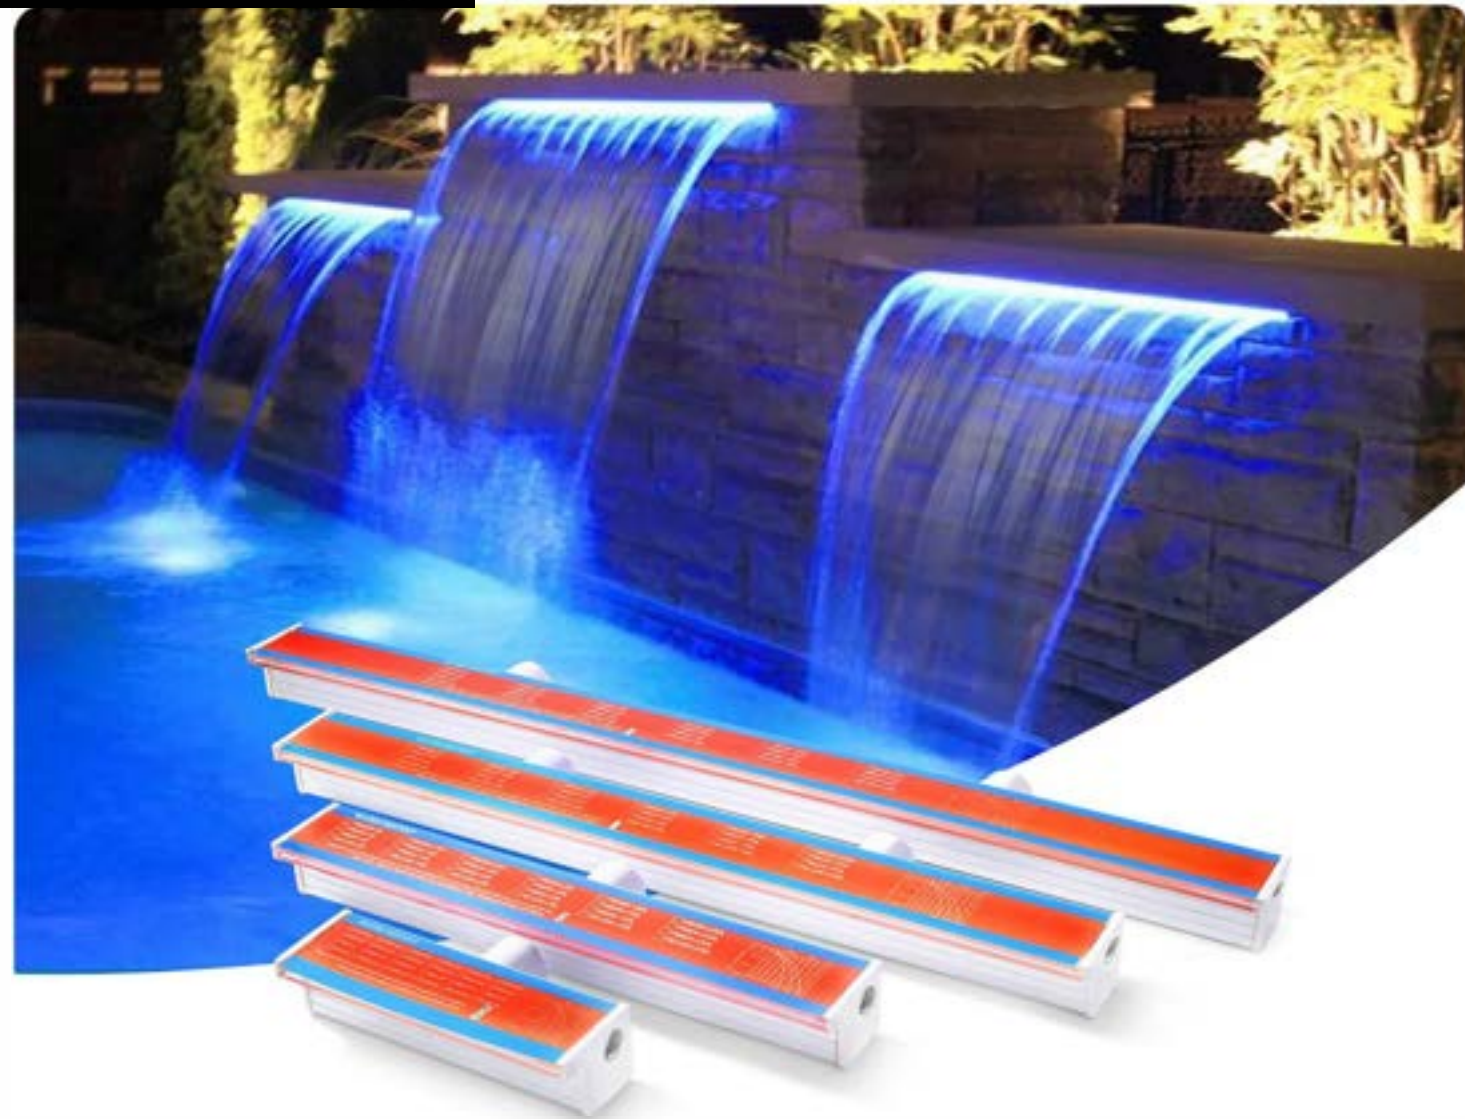

MODEL:DLX-PB

Schematic Diagram

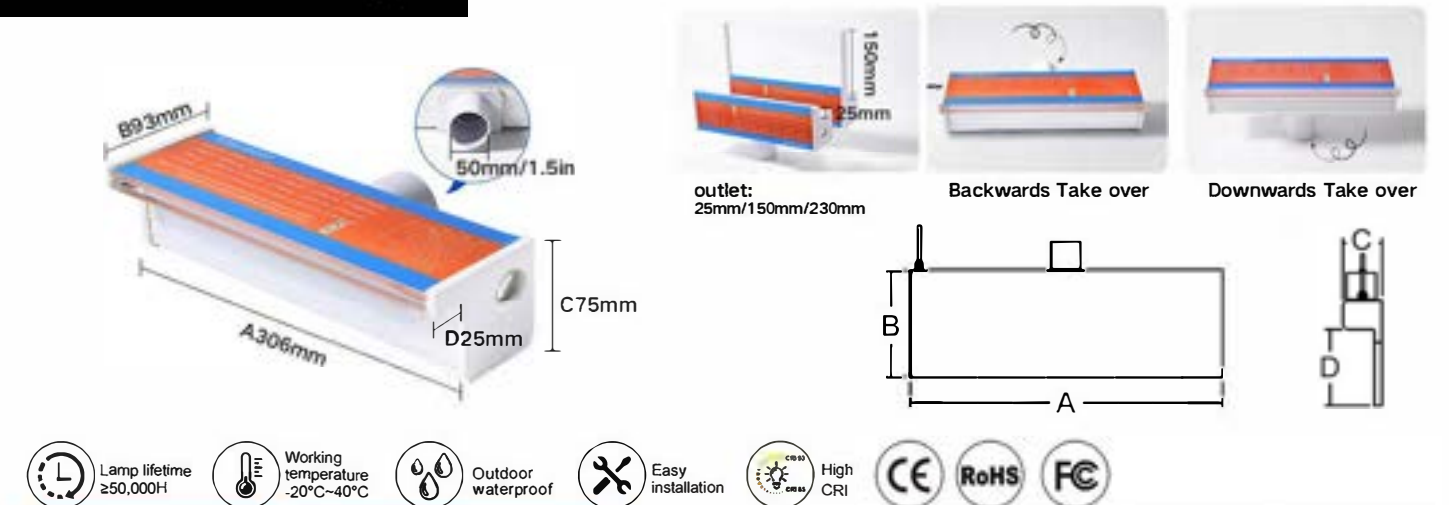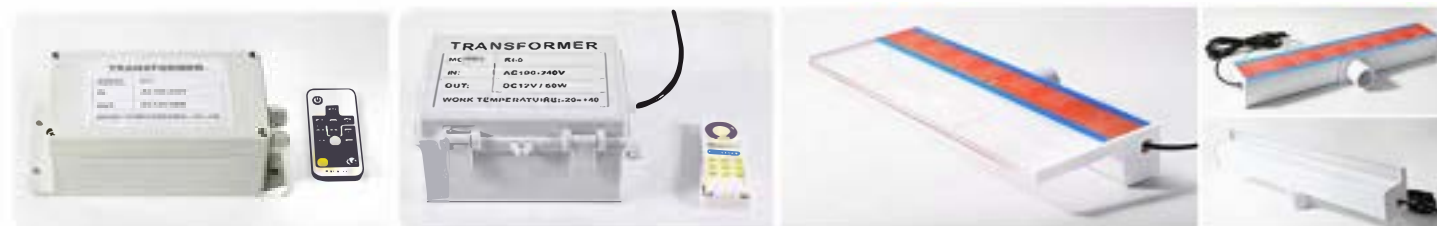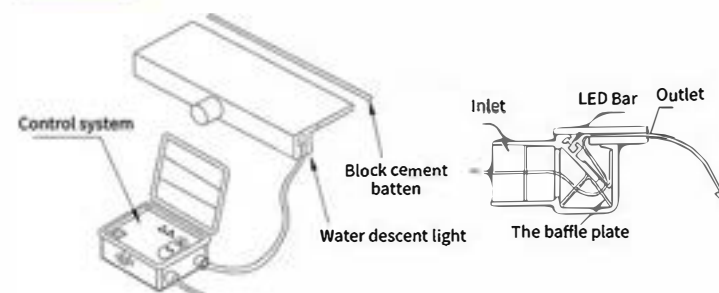

Model NO	Take Over Size mm		A mm	B mm	C mm	D mm	Power	Voltage
----------	-------------------	--	------	------	------	------	-------	---------

With LED light

PB300-25(L)	1.5 inch	50mm	306	93	75	25	4W	DC12V
PB300-150(L)	1.5 inch	50mm	306	218	75	150	4W	DC12V
PB300-230(L)	1.5 inch	50mm	306	298	75	230	4W	DC12V
PB600-25(L)	1.5 inch	50mm	606	93	75	25	8W	DC12V
PB600-150(L)	1.5 inch	50mm	606	218	75	150	8W	DC12V
PB600-230(L)	1.5 inch	50mm	606	298	75	230	8W	DC12V
PB900-25(L)	1.5 inch	50mm	906	93	75	25	12W	DC12V
PB900-150(L)	1.5 inch	50mm	906	218	75	150	12W	DC12V
PB900-230(L)	1.5 inch	50mm	906	298	75	230	12W	DC12V
PB1200-25(L)	1.5 inch	50mm	1206	93	75	25	17W	DC12V
PB1200-150(L)	1.5 inch	50mm	1206	218	75	150	17W	DC12V
PB1200-230(L)	1.5 inch	50mm	1206	298	75	230	17W	DC12V
PB1500-25(L)	1.5 inch	50mm	1506	93	75	25	21W	DC12V
PB1500-150(L)	1.5 inch	50mm	1506	218	75	150	21W	DC12V
PB1500-230(L)	1.5 inch	50mm	1506	298	75	230	21W	DC12V


Without LED Light

PB300-25	1.5 inch	50mm	306	93	75	25	—	—
PB300-150	1.5 inch	50mm	306	218	75	150	—	—
PB300-230	1.5 inch	50mm	306	298	75	230	—	—
PB600-25	1.5 inch	50mm	606	93	75	25	—	—
PB600-150	1.5 inch	50mm	606	218	75	150	—	—
PB600-230	1.5 inch	50mm	606	298	75	230	—	—
PB900-25	1.5 inch	50mm	906	93	75	25	—	—
PB900-150	1.5 inch	50mm	906	218	75	150	—	—
PB900-230	1.5 inch	50mm	906	298	75	230	—	—
PB1200-25	1.5 inch	50mm	1206	93	75	25	—	—
PB1200-150	1.5 inch	50mm	1206	218	75	150	—	—
PB1200-230	1.5 inch	50mm	1206	298	75	230	—	—
PB1500-25	1.5 inch	50mm	1506	93	75	25	—	—
PB1500-150	1.5 inch	50mm	1506	218	75	150	—	—
PB1500-230	1.5 inch	50mm	1506	298	75	230	—	—

UNDER WATER POOL LIGHTING



MODEL:DLX-PB




A variety of plug specifications to choose from




Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
PB300-25(L)	1.5 inch	50mm	306	93	75	25	4W
PB300-150(L)	1.5 inch	50mm	306	218	75	150	4W
PB300-230(L)	1.5 inch	50mm	306	298	75	230	4W
PB600-25(L)	1.5 inch	50mm	606	93	75	25	8W
PB600-150(L)	1.5 inch	50mm	606	218	75	150	8W
PB600-230(L)	1.5 inch	50mm	606	298	75	230	8W
PB900-25(L)	1.5 inch	50mm	906	93	75	25	12W
PB900-150(L)	1.5 inch	50mm	906	218	75	150	12W
PB900-230(L)	1.5 inch	50mm	906	298	75	230	12W
PB1200-25(L)	1.5 inch	50mm	1206	93	75	25	17W
PB1200-150(L)	1.5 inch	50mm	1206	218	75	150	17W
PB1200-230(L)	1.5 inch	50mm	1206	298	75	230	17W
PB1500-25(L)	1.5 inch	50mm	1506	93	75	25	21W
PB1500-150(L)	1.5 inch	50mm	1506	218	75	150	21W
PB1500-230(L)	1.5 inch	50mm	1506	298	75	230	21W

UNDER WATER POOL LIGHTING

Installation of waterfall lamp with Valve

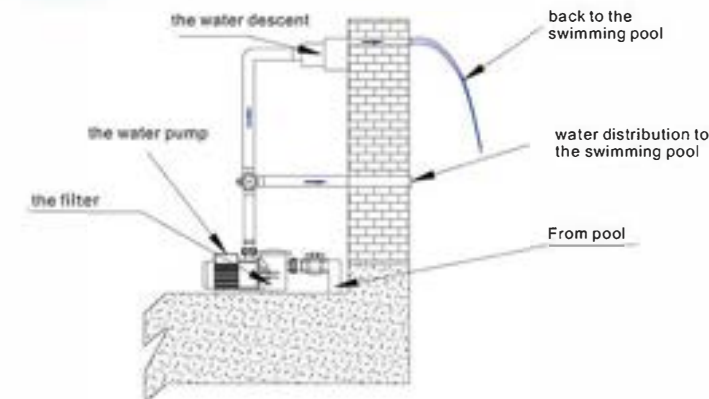


Installation of multiple waterfall lamps with valves (one valve per waterfall)

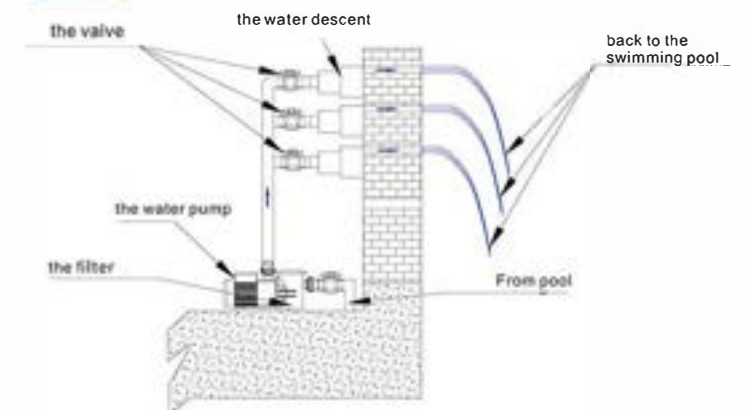


INSTALLATION FOR WATER DESCENT


EXISTING BUILT WALLS
PB300-25(L)/PB600-25(L)/PB900-25(L)/PB1200-25(L)/PB300-25/PB600-25/PB900-25/PB1200-25

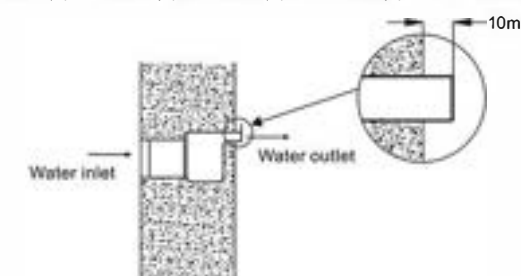

SINGLE BRICK WALLS DURING CONSTRUCTION
PB300-150(L)/PB600-150(L)/PB900-150(L)/PB1200-150(L)/PB300-150/PB600-150/PB900-150/PB1200-150

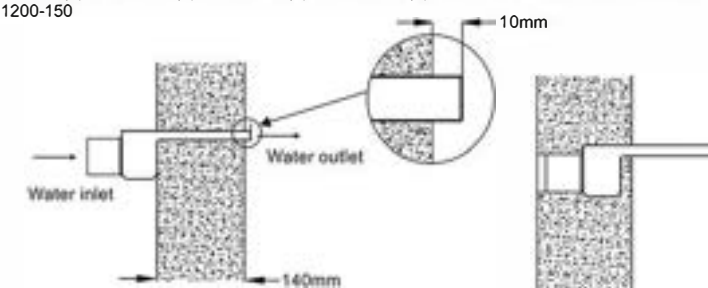


LIMESTONE BLOCK WALLS DURING CONSTRUCTION
PB300-230(L)/PB600-230(L)/PB900-230(L)/PB1200-230(L)/PB300-230/PB600-230/PB900-230/PB1200-230


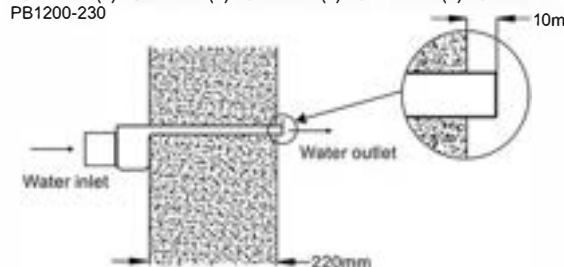


Technical Information



Schematic diagram of approximate projected waterfall length parameters per 300 mm water sheet.

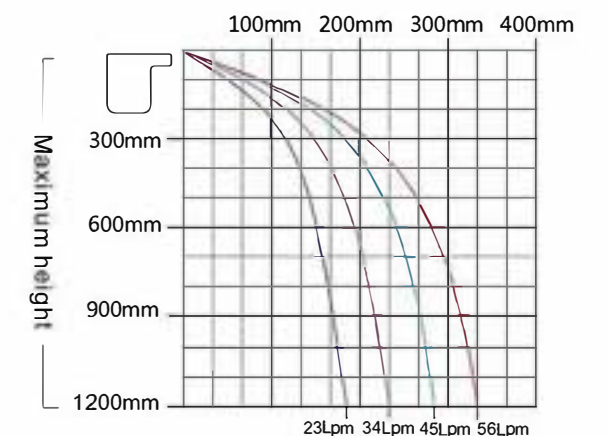

Build with circulation pumps (110V)



Build with Submersible Pump (24/48 Volt)

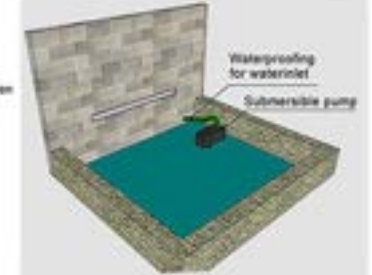
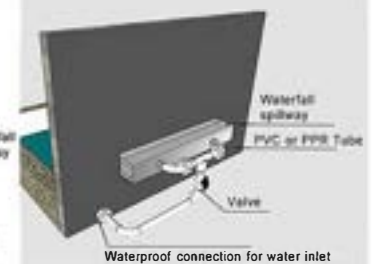




MODEL:DLX-PB-B

LED Water Descent

- Features, one-piece molding, more sturdy, uniform water output, beautiful and elegant design.
- Acrylic material, high temperature resistance, corrosion resistance, oxidation resistance.
- Constant Water Flow, Uniform and smooth water discharge effect.
- Suitable for villas, courtyards, gardens, pool water curtain walls.

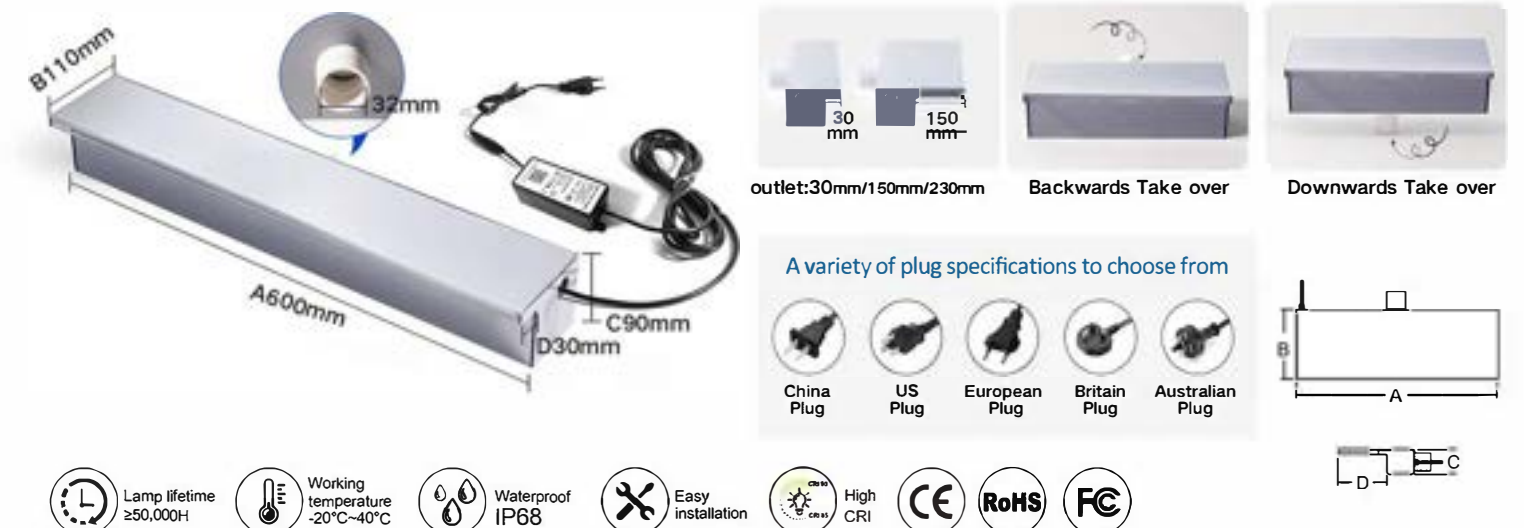

Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
PB300-B30(L)	32mm / 50mm	300	110	90	30	4W	Output : DC12V Input: AC100-240V
PB300-B150(L)	32mm / 50mm	300	230	90	150	4W	
PB300-B230(L)	32mm / 50mm	300	310	90	230	4W	
PB600-B30(L)	32mm / 50mm	600	110	90	30	8W	Output : DC12V Input: AC100-240V
PB600-B150(L)	32mm / 50mm	600	230	90	150	8W	
PB600-B230(L)	32mm / 50mm	600	310	90	230	8W	
PB900-B30(L)	32mm / 50mm	900	110	90	30	12W	Output : DC12V Input: AC100-240V
PB900-B150(L)	32mm / 50mm	900	230	90	150	12W	
PB900-B230(L)	32mm / 50mm	900	310	90	230	12W	
PB1200-B30(L)	32mm / 50mm	1200	110	90	30	17W	Output : DC12V Input: AC100-240V
PB1200-B150(L)	32mm / 50mm	1200	230	90	150	17W	
PB1200-B230(L)	32mm / 50mm	1200	310	90	230	17W	
PB1500-B30(L)	32mm / 50mm	1500	110	90	30	21W	Output : DC12V Input: AC100-240V
PB1500-B150(L)	32mm / 50mm	1500	230	90	150	21W	
PB1500-B230(L)	32mm / 50mm	1500	310	90	230	21W	

Without LED light							
PB300-B30	32mm / 50mm	300	110	90	30	—	—
PB300-B150	32mm / 50mm	300	230	90	150	—	
PB300-B230	32mm / 50mm	300	310	90	230	—	
PB600-B30	32mm / 50mm	600	110	90	30	—	—
PB600-B150	32mm / 50mm	600	230	90	150	—	
PB600-B230	32mm / 50mm	600	310	90	230	—	
PB900-B30	32mm / 50mm	900	110	90	30	—	—
PB900-B150	32mm / 50mm	900	230	90	150	—	
PB900-B230	32mm / 50mm	900	310	90	230	—	
PB1200-B30	32mm / 50mm	1200	110	90	30	—	—
PB1200-B150	32mm / 50mm	1200	230	90	150	—	
PB1200-B230	32mm / 50mm	1200	310	90	230	—	
PB1500-B30	32mm / 50mm	1500	110	90	30	—	—
PB1500-B150	32mm / 50mm	1500	230	90	150	—	
PB1500-B230	32mm / 50mm	1500	310	90	230	—	




MODEL:DLX-PB-S63



Two special water inlet designs

Both the back and bottom we have designed the inlet, you can choose one for inlet and the other you can close.

Either direction for plumbing

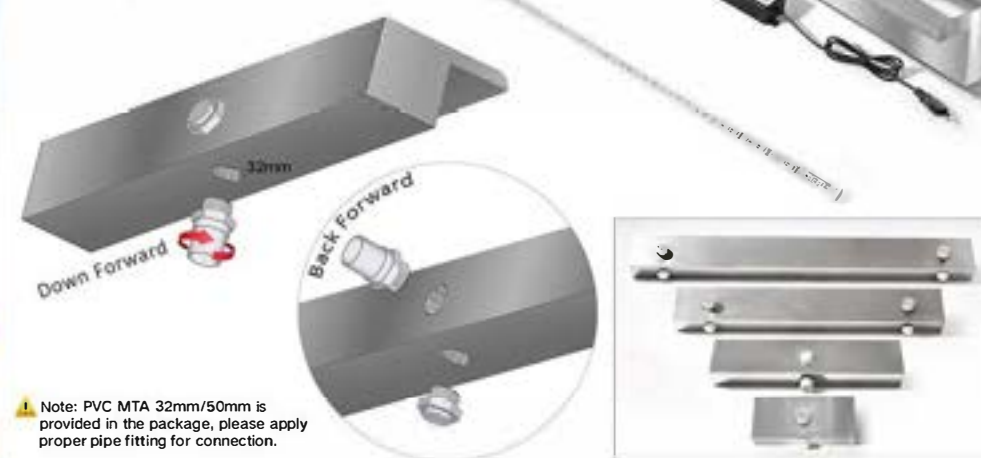

Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
PB300-S63(L)	32mm / 50mm	300	138	134	63	4W	Output : DC12V Input: AC100-240V
PB300-S150(L)	32mm / 50mm	300	225	134	150	4W	
PB300-S230(L)	32mm / 50mm	300	305	134	230	4W	
PB600-S63(L)	32mm / 50mm	600	138	134	63	8W	Output : DC12V Input: AC100-240V
PB600-S150(L)	32mm / 50mm	600	225	134	150	8W	
PB600-S230(L)	32mm / 50mm	600	305	134	230	8W	
PB900-S63(L)	32mm / 50mm	900	138	134	63	12W	Output : DC12V Input: AC100-240V
PB900-S150(L)	32mm / 50mm	900	225	134	150	12W	
PB900-S230(L)	32mm / 50mm	900	305	134	230	12W	
PB1200-S63(L)	32mm / 50mm	1200	138	134	63	17W	Output : DC12V Input: AC100-240V
PB1200-S150(L)	32mm / 50mm	1200	225	134	150	17W	
PB1200-S230(L)	32mm / 50mm	1200	305	134	230	17W	
PB1500-S63(L)	32mm / 50mm	1500	138	134	63	21W	Output : DC12V Input: AC100-240V
PB1500-S150(L)	32mm / 50mm	1500	225	134	150	21W	
PB1500-S230(L)	32mm / 50mm	1500	305	134	230	21W	


Without LED light

PB300-S63	32mm / 50mm	300	138	134	63	—	—
PB300-S150	32mm / 50mm	300	225	134	150	—	
PB300-S230	32mm / 50mm	300	305	134	230	—	
PB600-S63	32mm / 50mm	600	138	134	63	—	—
PB600-S150	32mm / 50mm	600	225	134	150	—	
PB600-S230	32mm / 50mm	600	305	134	230	—	
PB900-S63	32mm / 50mm	900	138	134	63	—	—
PB900-S150	32mm / 50mm	900	225	134	150	—	
PB900-S230	32mm / 50mm	900	305	134	230	—	
PB1200-S63	32mm / 50mm	1200	138	134	63	—	—
PB1200-S150	32mm / 50mm	1200	225	134	150	—	
PB1200-S230	32mm / 50mm	1200	305	134	230	—	
PB1500-S63	32mm / 50mm	1500	138	134	63	—	—
PB1500-S150	32mm / 50mm	1500	225	134	150	—	
PB1500-S230	32mm / 50mm	1500	305	134	230	—	

UNDER WATER POOL LIGHTING




Either direction for plumbing

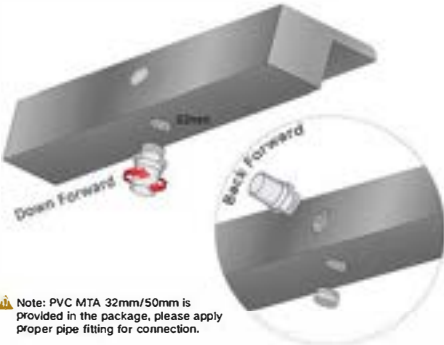

MODEL:DLX-PB-3S


Two special water inlet designs

Both the back and bottom we have designed the inlet, you can choose one for inlet and the other you can close.

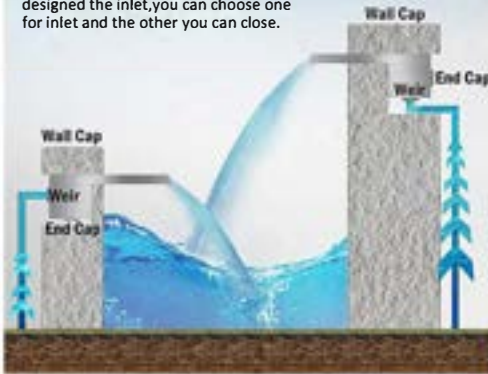


Two installation methods



Installation can be chosen to be either surface-mounted or recessed depending on the installation requirements.

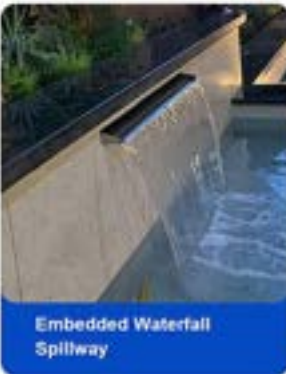

UNDER WATER POOL LIGHTING

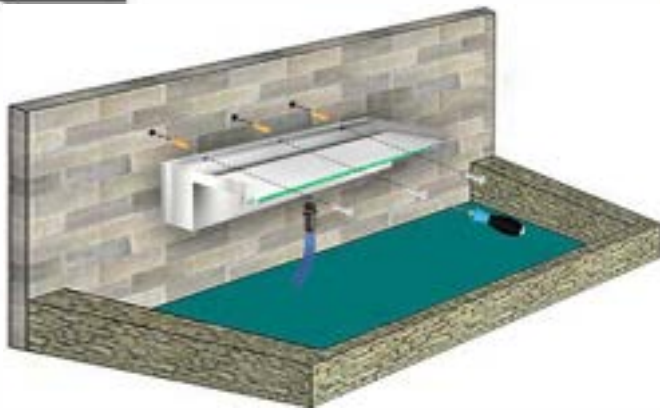

A variety of plug specifications to choose from

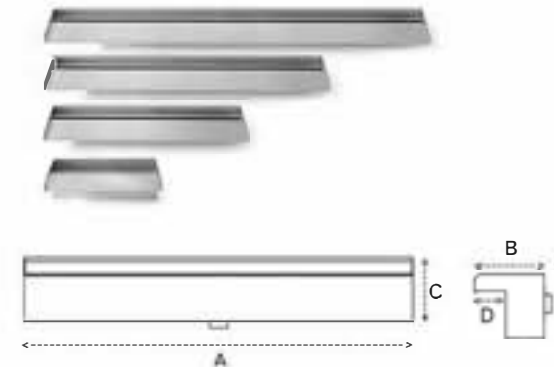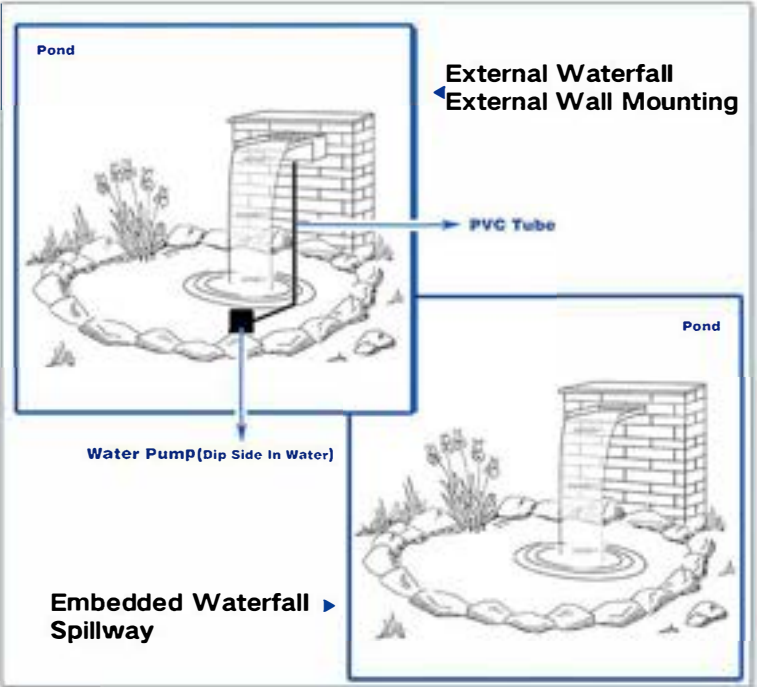

Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
PB300-3S125(L)	32mm / 50mm	300	200	100	125	4W	Output : DC12V Input: AC100-240V
PB600-3S125(L)	32mm / 50mm	600	200	100	125	8W	
PB900-3S125(L)	32mm / 50mm	900	200	100	125	12W	
PB1200-3S125(L)	32mm / 50mm	1200	200	100	125	17W	
PB1500-3S125(L)	32mm / 50mm	1500	200	100	125	21W	
PB2100-3S125(L)	32mm / 50mm	2100	200	100	125	28W	
Without LED light							
PB300-3S125(L)	32mm / 50mm	300	200	100	125	—	—
PB600-3S125(L)	32mm / 50mm	600	200	100	125	—	
PB900-3S125(L)	32mm / 50mm	900	200	100	125	—	
PB1200-3S125(L)	32mm / 50mm	1200	200	100	125	—	
PB1500-3S125(L)	32mm / 50mm	1500	200	100	125	—	
PB2100-3S125(L)	32mm / 50mm	2100	200	100	125	—	

UNDER WATER POOL LIGHTING




MODEL:DLX-PB-2A

Porously Linear Water Descent


- Multi-porous wire drawing shadow water feature, one-piece molding, more sturdy, uniformwater output, beautiful and elegant design.
- ABS material, high temperature resistance, corrosion resistance, oxidation resistance.
- Constant Water Flow,Uniform and smoothwater discharge effect.
- Suitable for villas, courtyards, gardens, pool water curtain walls.



UNDER WATER POOL LIGHTING

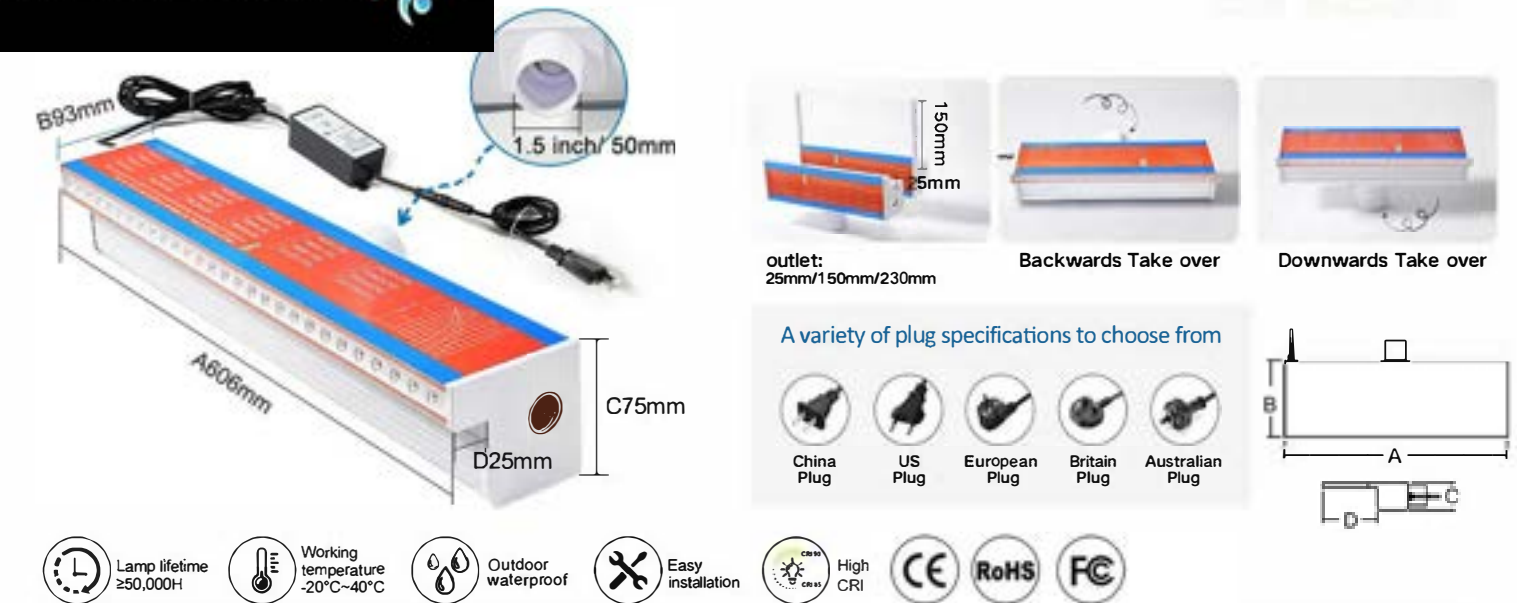

Model NO	Take Over Size mm		A mm	B mm	C mm	D mm	Power	Voltage
With LED light								
PB300-2A30(L)	1.5 inch	50mm	306	93	75	25	4W	Output : DC12V Input: AC100-240V
PB300-2A150(L)	1.5 inch	50mm	306	218	75	150	4W	
PB300-2A230(L)	1.5 inch	50mm	306	298	75	230	4W	
PB600-2A30(L)	1.5 inch	50mm	606	93	75	25	8W	Output : DC12V Input: AC100-240V
PB600-2A150(L)	1.5 inch	50mm	606	218	75	150	8W	
PB600-2A230(L)	1.5 inch	50mm	606	298	75	230	8W	
PB900-2A30(L)	1.5 inch	50mm	906	93	75	25	12W	Output : DC12V Input: AC100-240V
PB900-2A150(L)	1.5 inch	50mm	906	218	75	150	12W	
PB900-2A230(L)	1.5 inch	50mm	906	298	75	230	12W	
PB1200-2A30(L)	1.5 inch	50mm	1206	93	75	25	17W	Output : DC12V Input: AC100-240V
PB1200-2A150(L)	1.5 inch	50mm	1206	218	75	150	17W	
PB1200-2A230(L)	1.5 inch	50mm	1206	298	75	230	17W	
PB1500-2A30(L)	1.5 inch	50mm	1506	93	75	25	21W	Output : DC12V Input: AC100-240V
PB1500-2A150(L)	1.5 inch	50mm	1506	218	75	150	21W	
PB1500-2A230(L)	1.5 inch	50mm	1506	298	75	230	21W	

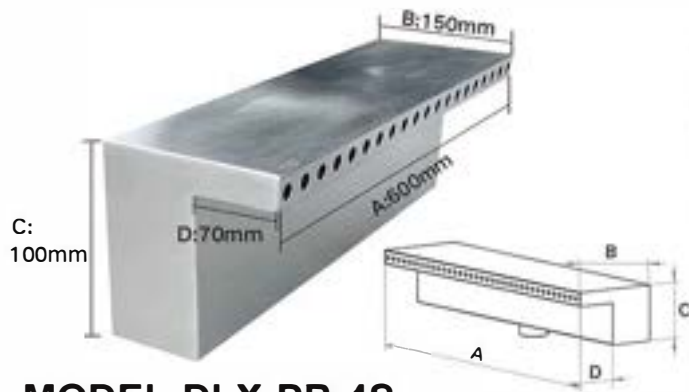

MODEL:DLX-PB-4S





Model No	Take over size mm		A mm	D mm	C mm	D mm	Power	VOLTS
With LED light								
PB300-4S70L	32mm	50mm	300	150	100	70	4W	Output: DC12V Input: AC100-240V
PB600-4S70L	32mm	50mm	600	150	100	70	8W	
PB900-4S70L	32mm	50mm	900	150	100	70	12W	
PB1200-4S70L	32mm	50mm	1200	150	100	70	17W	
PB1500-4S70L	32mm	50mm	1500	150	100	70	21W	
PB2100-4S70L	32mm	50mm	2100	150	100	70	28W	
Without LED light								
PB300-4S70	32mm	50mm	300	150	100	70	-	-
PB600-4S70	32mm	50mm	600	150	100	70	-	-
PB900-4S70	32mm	50mm	900	150	100	70	-	-
PB1200-4S70	32mm	50mm	1200	150	100	70	-	-
PB1500-4S70	32mm	50mm	1500	150	100	70	-	-
PB2100-4S70	32mm	50mm	2100	150	100	70	-	-

UNDER WATER POOL LIGHTING



MODEL:DLX-PB-6S

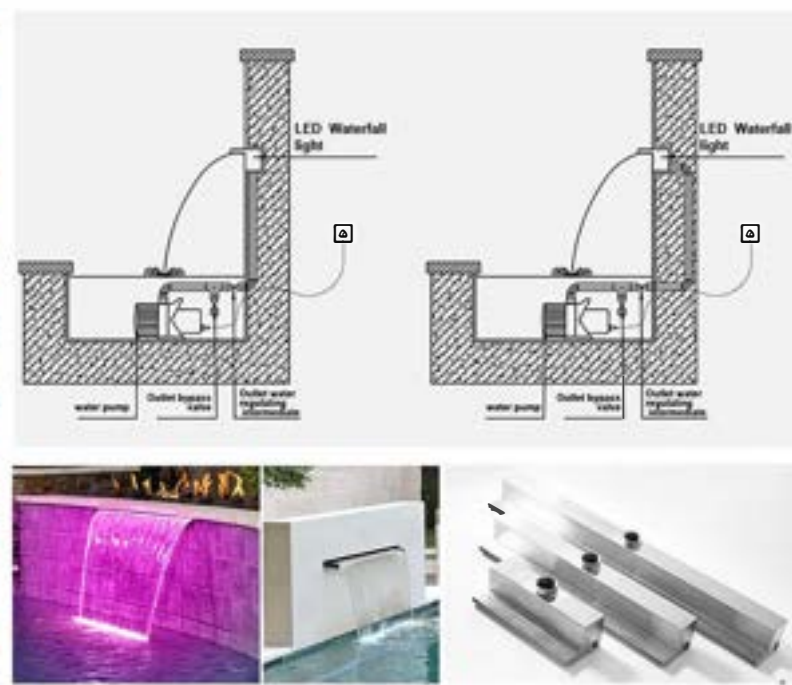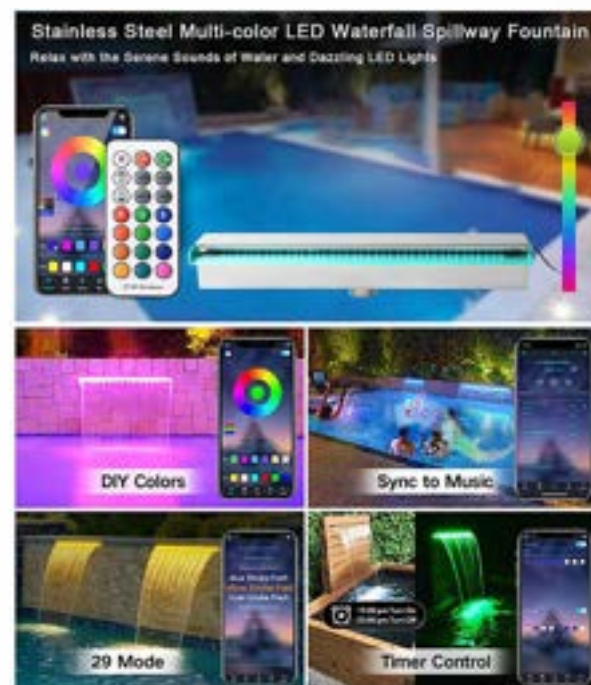

UNDER WATER POOL LIGHTING



Model NO	Take Over Size mm	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
PB300-6S50(L)	32mm / 50mm	300	116	87	50	4W	Output : DC12V Input: AC100-240V
PB300-6S150(L)	32mm / 50mm	300	216	87	150	4W	
PB300-6S230(L)	32mm / 50mm	300	296	87	230	4W	
PB600-6S50(L)	32mm / 50mm	600	116	87	50	8W	Output : DC12V Input: AC100-240V
PB600-6S150(L)	32mm / 50mm	600	216	87	150	8W	
PB600-6S230(L)	32mm / 50mm	600	296	87	230	8W	
PB900-6S50(L)	32mm / 50mm	900	116	87	50	12W	Output : DC12V Input: AC100-240V
PB900-6S150(L)	32mm / 50mm	900	216	87	150	12W	
PB900-6S230(L)	32mm / 50mm	900	296	87	230	12W	
PB1200-6S50(L)	32mm / 50mm	1200	116	87	50	17W	Output : DC12V Input: AC100-240V
PB1200-S150(L)	32mm / 50mm	1200	216	87	150	17W	
PB1200-S230(L)	32mm / 50mm	1200	296	87	230	17W	
PB1500-S50(L)	32mm / 50mm	1500	116	87	50	21W	Output : DC12V Input: AC100-240V
PB1500-S150(L)	32mm / 50mm	1500	216	87	150	21W	
PB1500-S230(L)	32mm / 50mm	1500	296	87	230	21W	

Without LED light							
PB300-6S50	32mm / 50mm	300	116	87	50	—	—
PB300-6S150	32mm / 50mm	300	216	87	150	—	
PB300-6S230	32mm / 50mm	300	296	87	230	—	
PB600-6S50	32mm / 50mm	600	116	87	50	—	—
PB600-6S150	32mm / 50mm	600	216	87	150	—	
PB600-6S230	32mm / 50mm	600	296	87	230	—	
PB900-6S50	32mm / 50mm	900	116	87	50	—	—
PB900-6S150	32mm / 50mm	900	216	87	150	—	
PB900-6S230	32mm / 50mm	900	296	87	230	—	
PB1200-6S50	32mm / 50mm	1200	116	87	50	—	—
PB1200-6S150	32mm / 50mm	1200	216	87	150	—	
PB1200-6S230	32mm / 50mm	1200	296	87	230	—	
PB1500-6S50	32mm / 50mm	1500	116	87	50	—	—
PB1500-6S150	32mm / 50mm	1500	216	87	150	—	
PB1500-6S230	32mm / 50mm	1500	296	87	230	—	



MODEL:DLX-SM-F



- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP67



Easy installation



High CRI



CE



RoHS



FC
- | Product | Model | Size(mm) | Power | LED Color | Working Voltage | Size | Body Material |
|---------------|----------|-------------|-------|------------------------|--|---|-----------------|
| Water Curtain | DLX-SM-F | L1000*60*60 | 21W | Whith/
Warm/
RGB | Input:
AC100V
~240V
Output :
DC12V | Water Inlet:
DN40/1.5inch
Water outlet:
M30 /meter | Stainless steel |
| | | L2000*60*60 | 42W | | | | |
| | | L3000*60*60 | 63W | | | | |
| | | Customized | | | | | |
- 94
- 
- MODEL:DLX-SM-Y
- 
- EASY TO INSTALL

Connect to the water pump


- 
- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Waterproof
IP67



Easy installation



High CRI



CE



RoHS




FC

Product	Model	Size(mm)	Water Inlet Size	Water outlet Size	Body Material
Water Curtain	DLX-SM-Y	L1000*φ50	DN40/1.5inch	M30 /meter	Stainless steel
		L2000*φ50			
		L3000*φ50			
		Customized			

95



MODEL:DLX-HG03

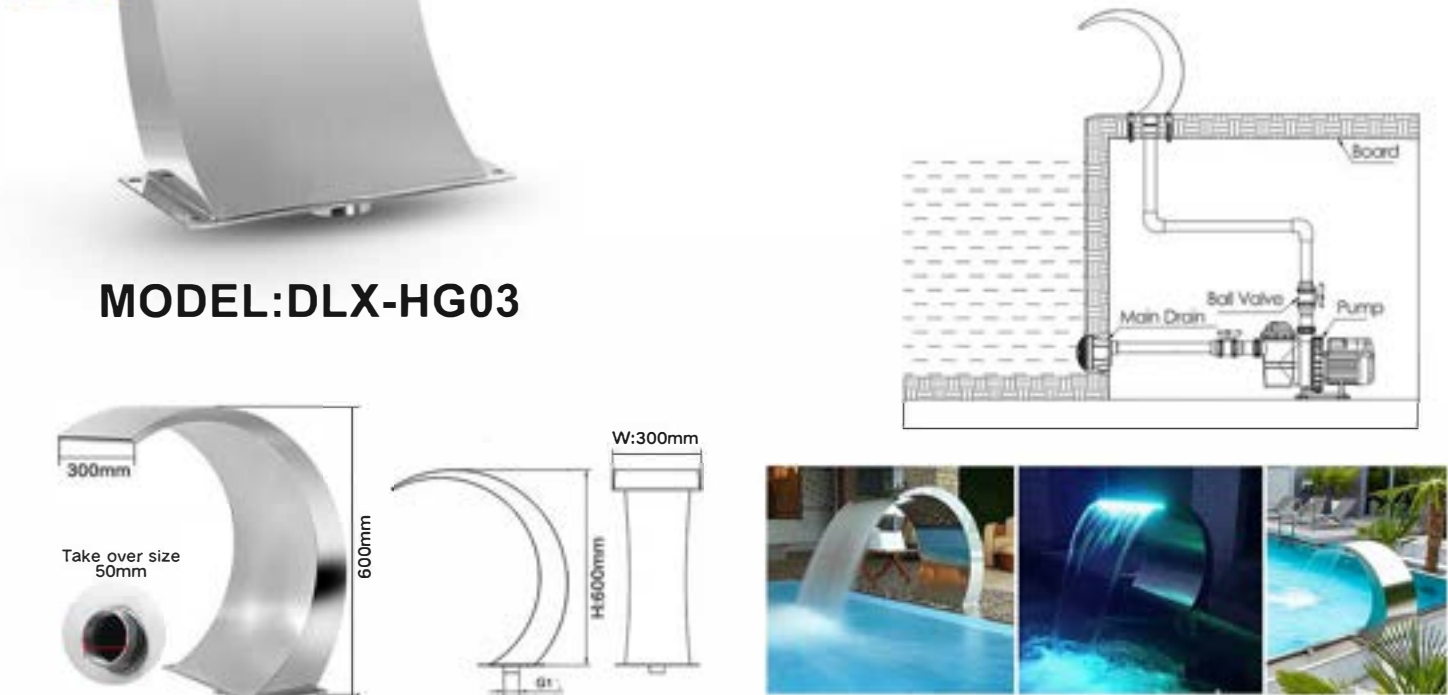

- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Outdoor waterproof



Easy installation



High CRI



CE



RoHS



FCC

Product	Model	Size(mm)	Light Source	Take over size	Body Material
Arc Hook Waterfall Water Curtain	DLX-HG03	H400*W200 / H600*W300 H700*W400 / H800*W500	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel



MODEL:DLX-HG05



- 

Lamp lifetime
≥50,000H



Working temperature
-20°C~40°C



Outdoor waterproof



Easy installation



High CRI



CE




RoHS



FCC

Product	Model	Size(mm)	Light Source	Take over size	Body Material
Arc Hook Waterfall Water Curtain	DLX-HG05	H400*W200 / H600*W300 H600*W500 / H700*W400 H700*W500 / H800*W500 H1000*W500	Without LED light / With LED light	32mm / 50mm	Satin/Mirror Stainless steel

UNDER WATER POOL LIGHTING

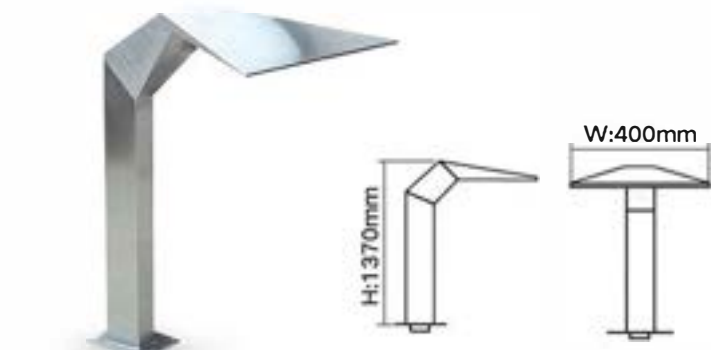

Product	Model	Size(mm)	Light Source	Take over size	Body Material
Geometry Waterfall Water Curtain	DLX-HG01	H1370*W300*1.2 H1370*W400*1.2 H1370*W500*1.2 H1370*W600*1.2	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel




Product	Model	Size(mm)	Light Source	Take over size	Body Material
Arc Hook Waterfall Water Curtain	DLX-HG02	H400*W200 / H600*W300 H600*W400 / H600*W500	Without LED light / With LED light	32mm / 50mm	Satin/Mirror Stainless steel




Product	Model	Size(mm)	Light Source	Take over size	Body Material
Arc Hook Waterfall Water Curtain	DLX-HG04	H250*W100 / H400*W200 H600*W300	Without LED light / With LED light	32mm / 50mm	Satin/Mirror Stainless steel

UNDER WATER POOL LIGHTING

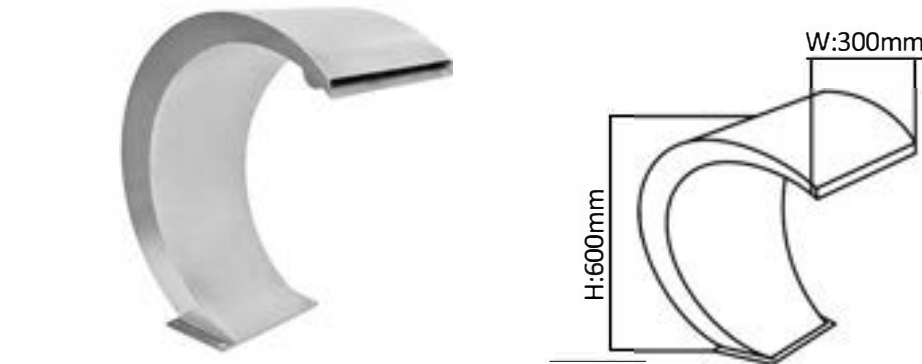

Product	Model	Size(mm)	Light Source	Take over size	Body Material
Arc Hook Waterfall Water Curtain	DLX-HG06	H600*W300 / H700*W400 H800*W500 / H1000*W500 H1000*W600	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel

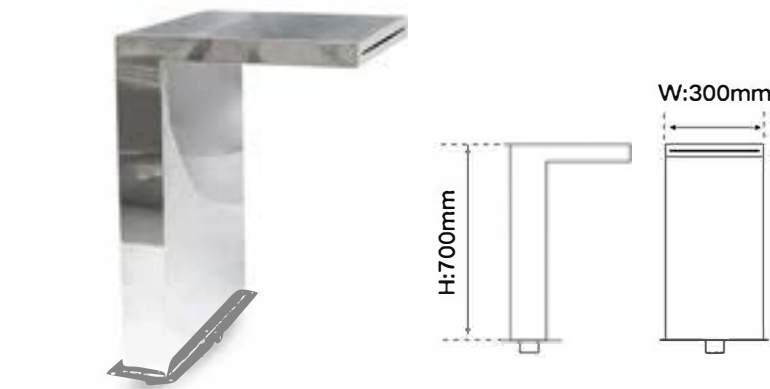

Product	Model	Size(mm)	Light Source	Take over size	Body Material
7-shaped Waterfall Water Curtain	DLX-HG07	H700*W300 / H700*W500 H700*W700 / H700*W800	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel




Product	Model	Size(mm)	Light Source	Take over size	Body Material
Sloping Arc Hook Waterfall Water Curtain	DLX-HG08	H600*W300 / H600*W400 H600*W500 / H800*W500 H800*W600 / H1000*W500	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel

UNDER WATER POOL LIGHTING



Product	Model	Size(mm)	Light Source	Take over size	Body Material
Arc Hook Waterfall Water Curtain	DLX-HG09	H600*W300 / H700*W400 H800*W500 / H1000*W500	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel

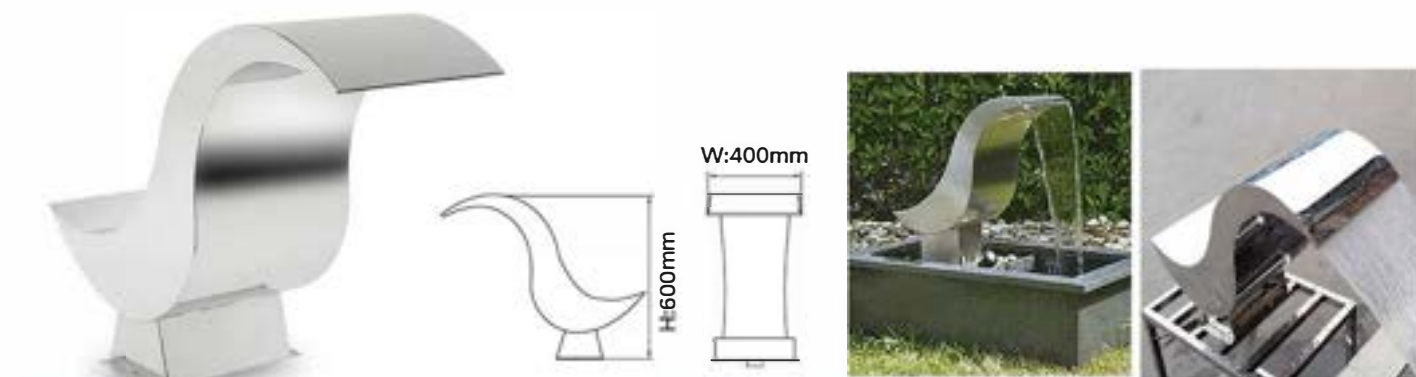


Product	Model	Size(mm)	Light Source	Take over size	Body Material
S-shaped Waterfall Water Curtain	DLX-HG10	H600*W400	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel



Product	Model	Size(mm)	Light Source	Take over size	Body Material
Vortex Shape Waterfall Water Curtain	DLX-HG11	H800*W500	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel



UNDER WATER POOL LIGHTING

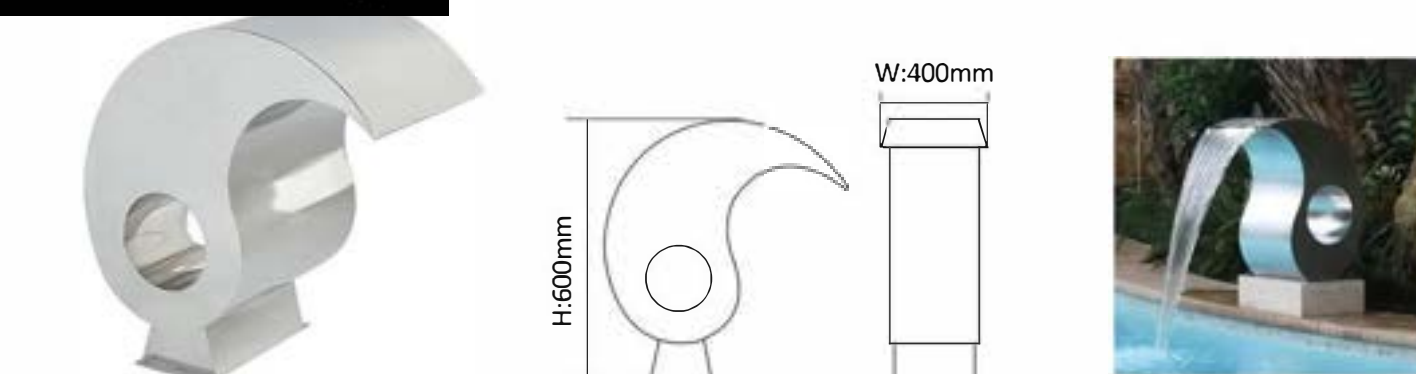

Product	Model	Size(mm)	Light Source	Take over size	Body Material
Eagle beak Waterfall Water Curtain	DLX-HG12	H600*W400	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel



Product	Model	Size(mm)	Light Source	Take over size	Body Material
Dolphin Shaped Waterfall Water Curtain	DLX-HG13	H600*W300	Without LED light / With LED light	50mm	Satin/Mirror Stainless steel

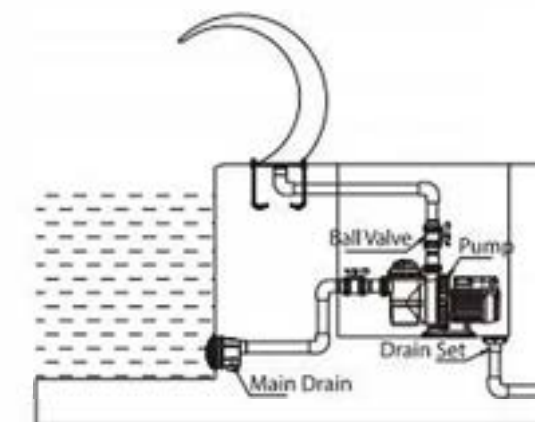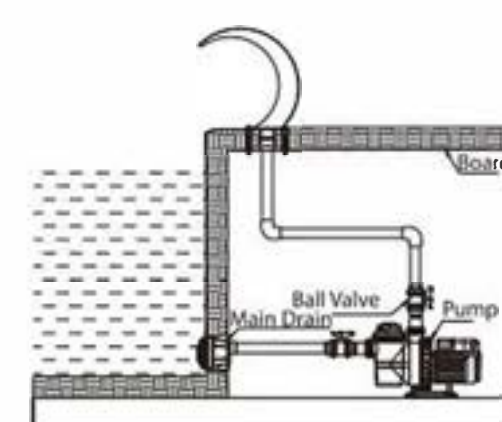


UNDER WATER POOL LIGHTING

UNDER WATER POOL LIGHTING



Product	Model	Take over size mm	A mm	B mm	C mm	B mm	E mm	Power	Voltage
Acrylic Arc Hook Waterfall Water Curtain	WF-300	50mm/1.5inch	600	423.5	320	236	416	—	Output : DC12V Input: AC100-240V
	WF-301	63mm/2inch	750	540.6	395	280	500	—	
	WF-300LED	50mm/1.5inch	600	423.5	320	236	416	12W	
	WF-301LED	63mm/2inch	750	540.6	395	280	500	13W	

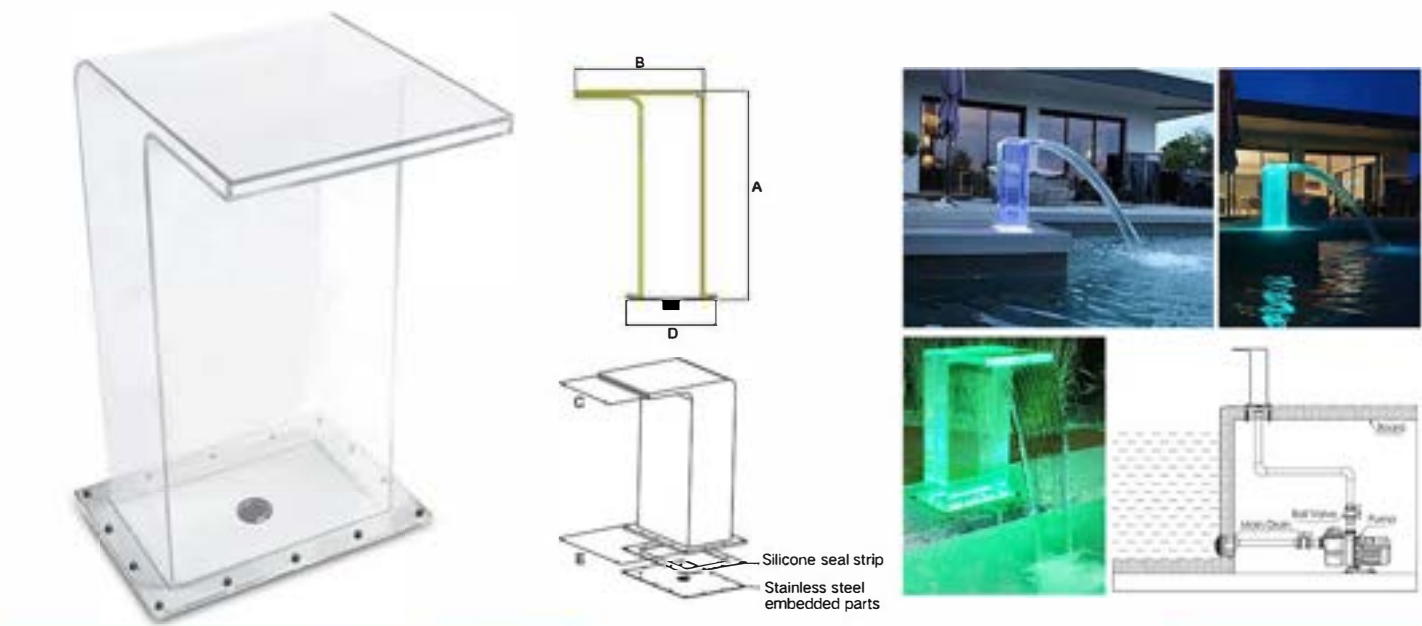

Product	Model	Take over size mm	A mm	B mm	C mm	D mm	E mm	Power	Voltage
Acrylic 7-Shape Waterfall Water Curtain	WF-302	50mm/1.5inch	603	450	300	280	400	—	Output : DC12V Input: AC100-240V
	WF-303	63mm/2inch	800	500	400	350	500	—	
	WF-302LED	50mm/1.5inch	603	450	300	280	400	13W	
	WF-303LED	63mm/2inch	800	500	400	350	500	14W	




Features




series is gisigned according to the Principles of hydraulics.Its motor is with exteral ventilation design,and the winding design is advanced,liquids part is made of high reinforce engineering plastic which is durable. The strainer with high capacity helps reducing the cleaning work.It is with good performance and high efficiency.It accelerates water injection(irrigation)rate and improves energy efficiency. It is applicable to:swimming pool, industrial water.oceans pavilion,water park,ect.



Performance chart

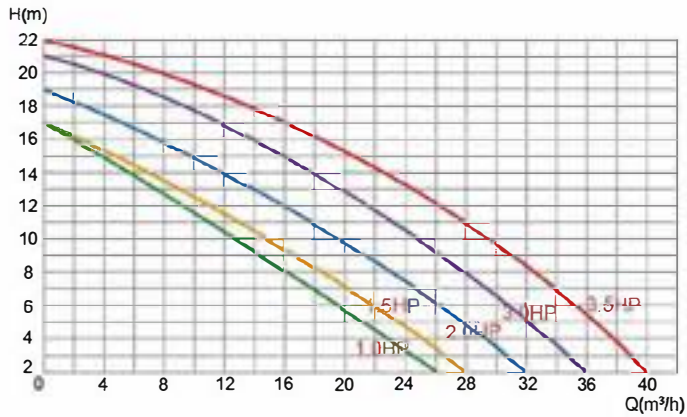

1. Large nut
2. Transparent cover
3. O-ring seal
4. Filter basket
5. Live joint nut
6. Pipe fitting
7. Bushing
8. O-ring seal
9. Bucket body
10. Bolt
11. Spring washer
12. plug
13. O-ring seal
14. Flat washer
15. Bolt
16. O-ring seal
17. Bolt
18. Impeller front cover
19. Water impeller
20. Mechanical seal
21. O-ring seal
22. Rear coverange
23. Bolt
24. Motor flange
25. Bearing
26. Flat washer
27. Bolt
28. shaft
29. Motor
30. Base

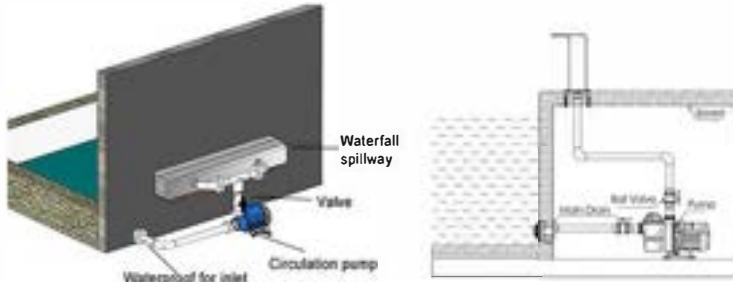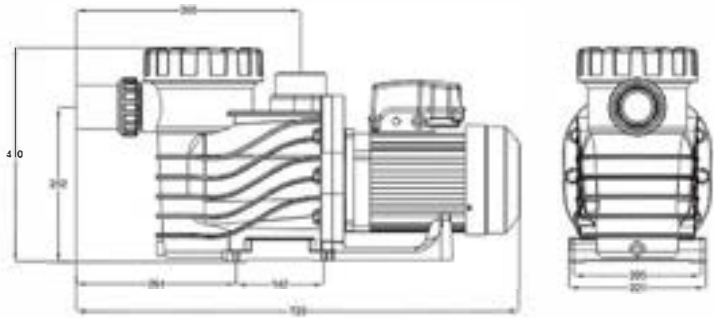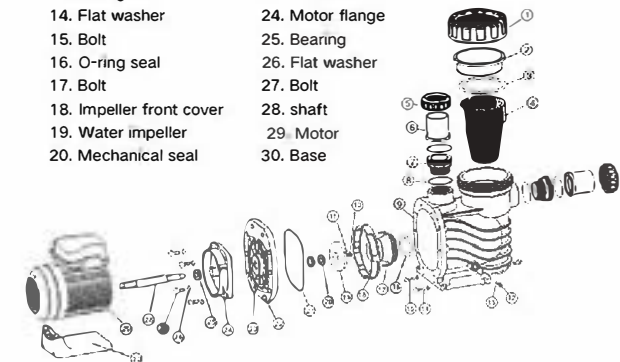

Product	Model	Voltage(V)	Power (Kw/HP)	H-Max (m)	Q-max (m³/h)	Motor Speed (r/min)	Port Size (inch)	Outer Package (mm)	GW(kg)
AKP water pump	AKP-100	220V/380V/50Hz	0.75/1.0	17	25	2850	2"	715x305x440	19.5
	AKP-150	220V-50Hz	1.1/1.5	17	28	2850	2"	715x305x440	20.5
	AKP-200	220V-50Hz	1.5/2.0	19	32	2850	2"	715x305x440	22
	AKP-300	220V/380V/50Hz	2.2/3.0	21	36	2850	2"	715x305x440	24
	AKP-350	220V/380V/50Hz	2.6/3.5	22	40	2850	2"	715x305x440	25
	AKP-400	220V/380V/50Hz	3/4.0	23	44	2850	2"	715x305x440	25.5

■ SP pump with three-phase motors



Features


SP series is designed according to the Principles of hydraulics Its motor is with internal ventilation design ,and the winding design is advanced .Liquids part is made of high reinforce engine ring plastic which is durable .The strainer with high capacity helps reducing the cleaning work. It is with good performance and high efficiency.It accelerates water injection(irrigation)rate and improves energy efficiency. It is applicable to :swimming pool, industrial water, oceans pavilion , water park, etc.



Accessories



Performance chart

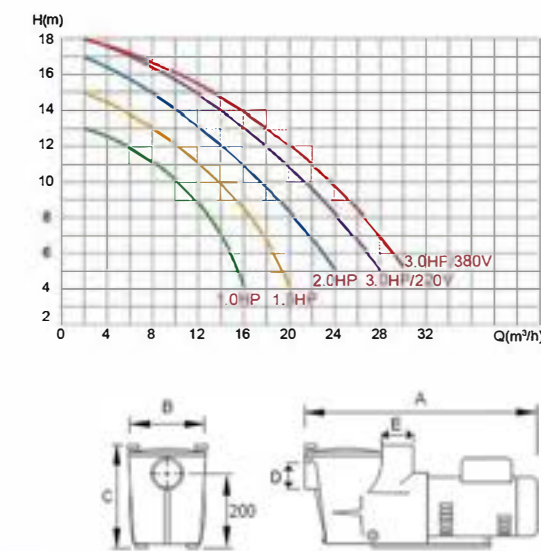


Product	Model	Code	A (mm)	B (mm)	C (mm)	D (inch)	E (inch)	Voltage (V)	Specification	Package (mm)	CW(kg)
water pump	SP1005	E-40	600	219	276	2"	2"	220	1.0HP	690x230x305	23.5
	SP1503	E-08	610	219	276	2"	2"	220	1.5HP	690x230x305	23.5
	SP2001	E-09	610	219	276	2"	2"	220	2.0HP	690x230x305	23.5
	SP3004	E-10	610	219	276	2"	2"	220	3.0HP	690x230x305	23.5
	SPT 3002	E-19	660	219	276	2"	2"	220	3.0HP	690x230x305	23.5



MODEL:DLX-JX




MODEL:DLX-JX-S

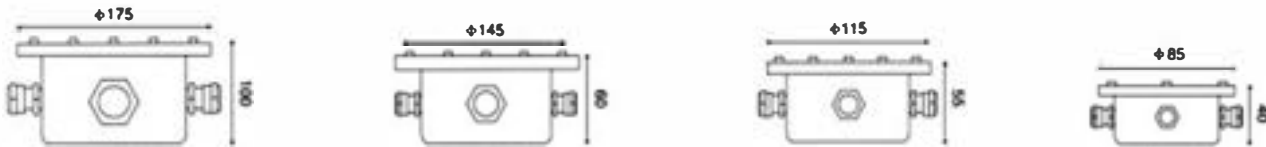

Product	Model	Hole	Size(mm)	Wire diameter	Body Material	Waterproof grade
Terminal Box	DLX-JX-S	2	D85*H40	7.5mm	304 stainless steel	IP68
		3	D85*H40			
		4	D85*H40			
		5	D115*H55			
		6	D120*H55			
		7	D145*H55			
		8	D145*H55			
		9	D145*H55			
		10	D175*H100			
		11	D175*H100			
		12	D175*H100			



MODEL:DLX-BY

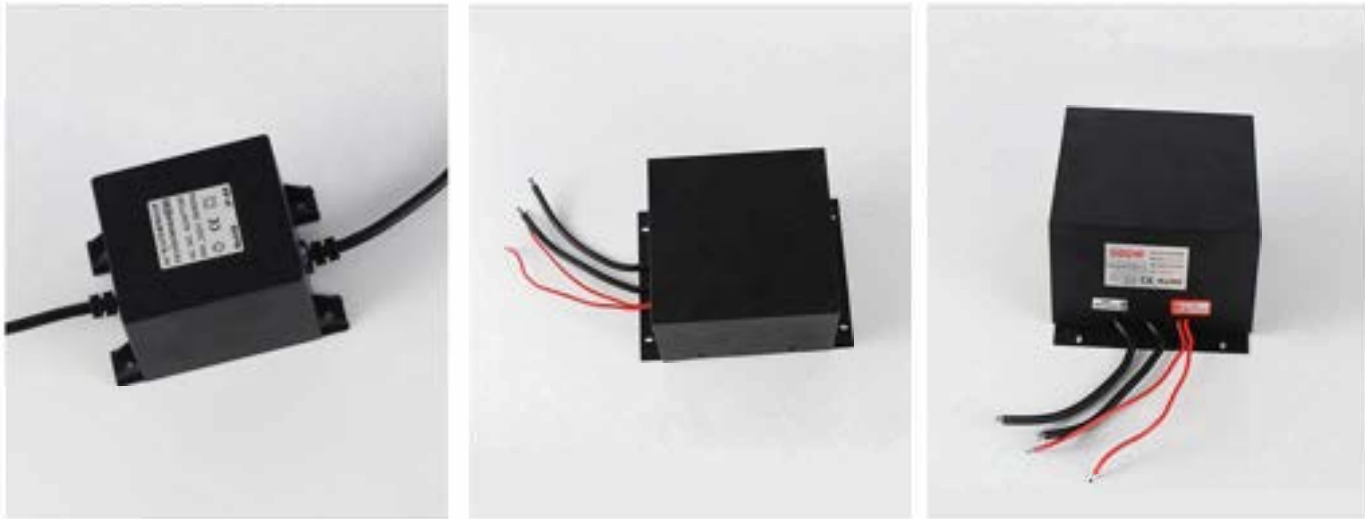

Product	Model	Power	Size(mm)	Working Voltage	Body Material	Waterproof grade
Transformer	DLX-BY	30W	105*70*75	AC12V/24V	Plastic+ thick copper wire	IP68
		60W	110*70*75			
		80W	110*70*75			
		105W	178*126*65			
		160W	198*126*65			
		200W	197*135*70			
		300W	190*140*75			
		400W	190*140*75			
		500W	225*150*80			
		600W	155*150*100			
		800W	188*188*115			
		1000W	188*188*115			




MODEL:DLX-KG




Product	Model	Power	Size(mm)	Working Voltage	Body Material	Waterproof grade
Transformer	DLX-KG	36W	113*37*23	Output Voltage: DC12V/24V	Aluminum Alloy + thick copper wire	IP67
		45W	140*40*23			
		60W	150.5*40.5*23			
		80W	180.5*40.5*23	Input Voltage: 100-265V		
		100W	200*55*23			
		150W	225*56*25			
		200W	215*75*35	Output Voltage: DC12V/24V		
		250W	215*75*35			
		300W	235*75*35	Input Voltage: 170-265V or 110-170V		
		400W	255*75*35			

Fountain Nozzle

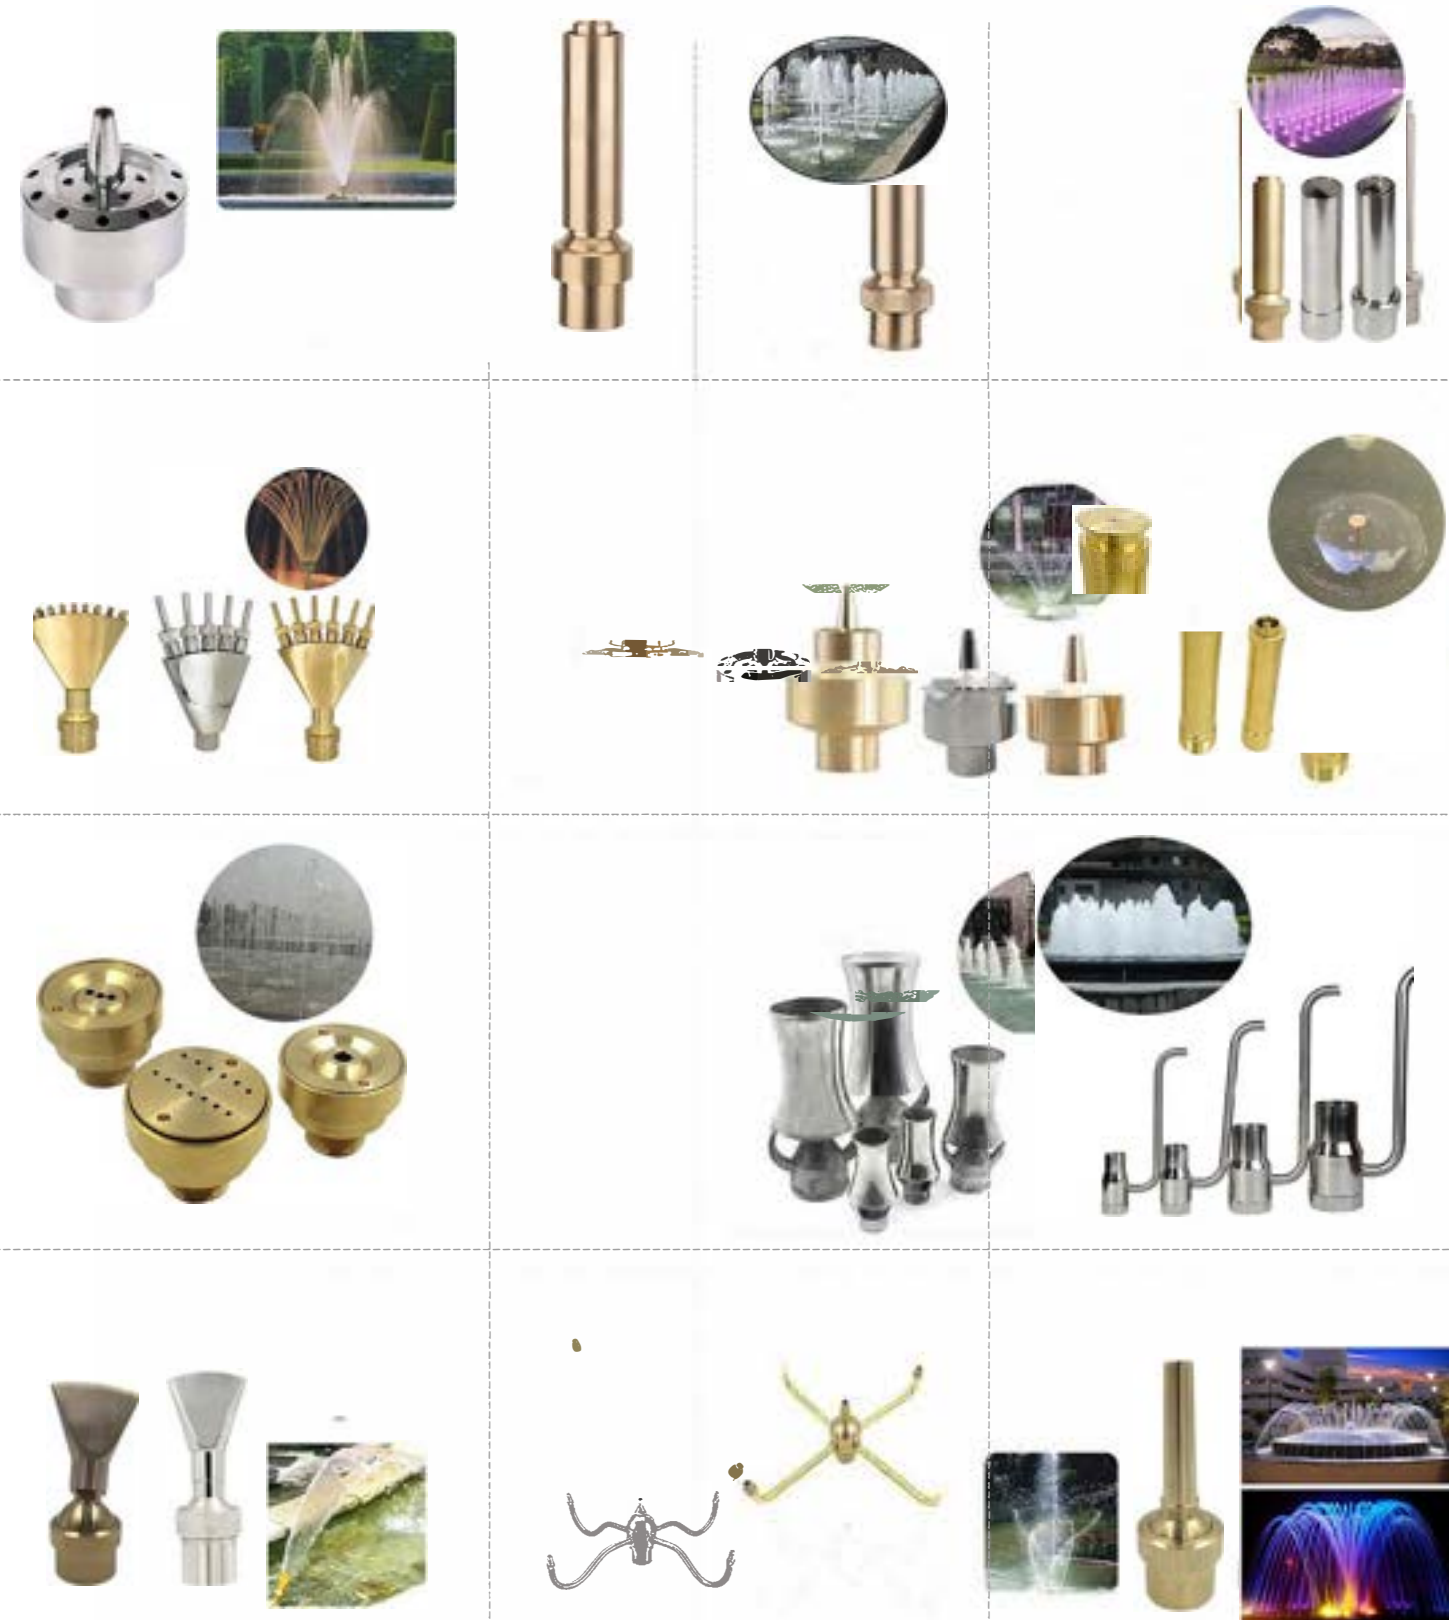

Fountain Nozzle

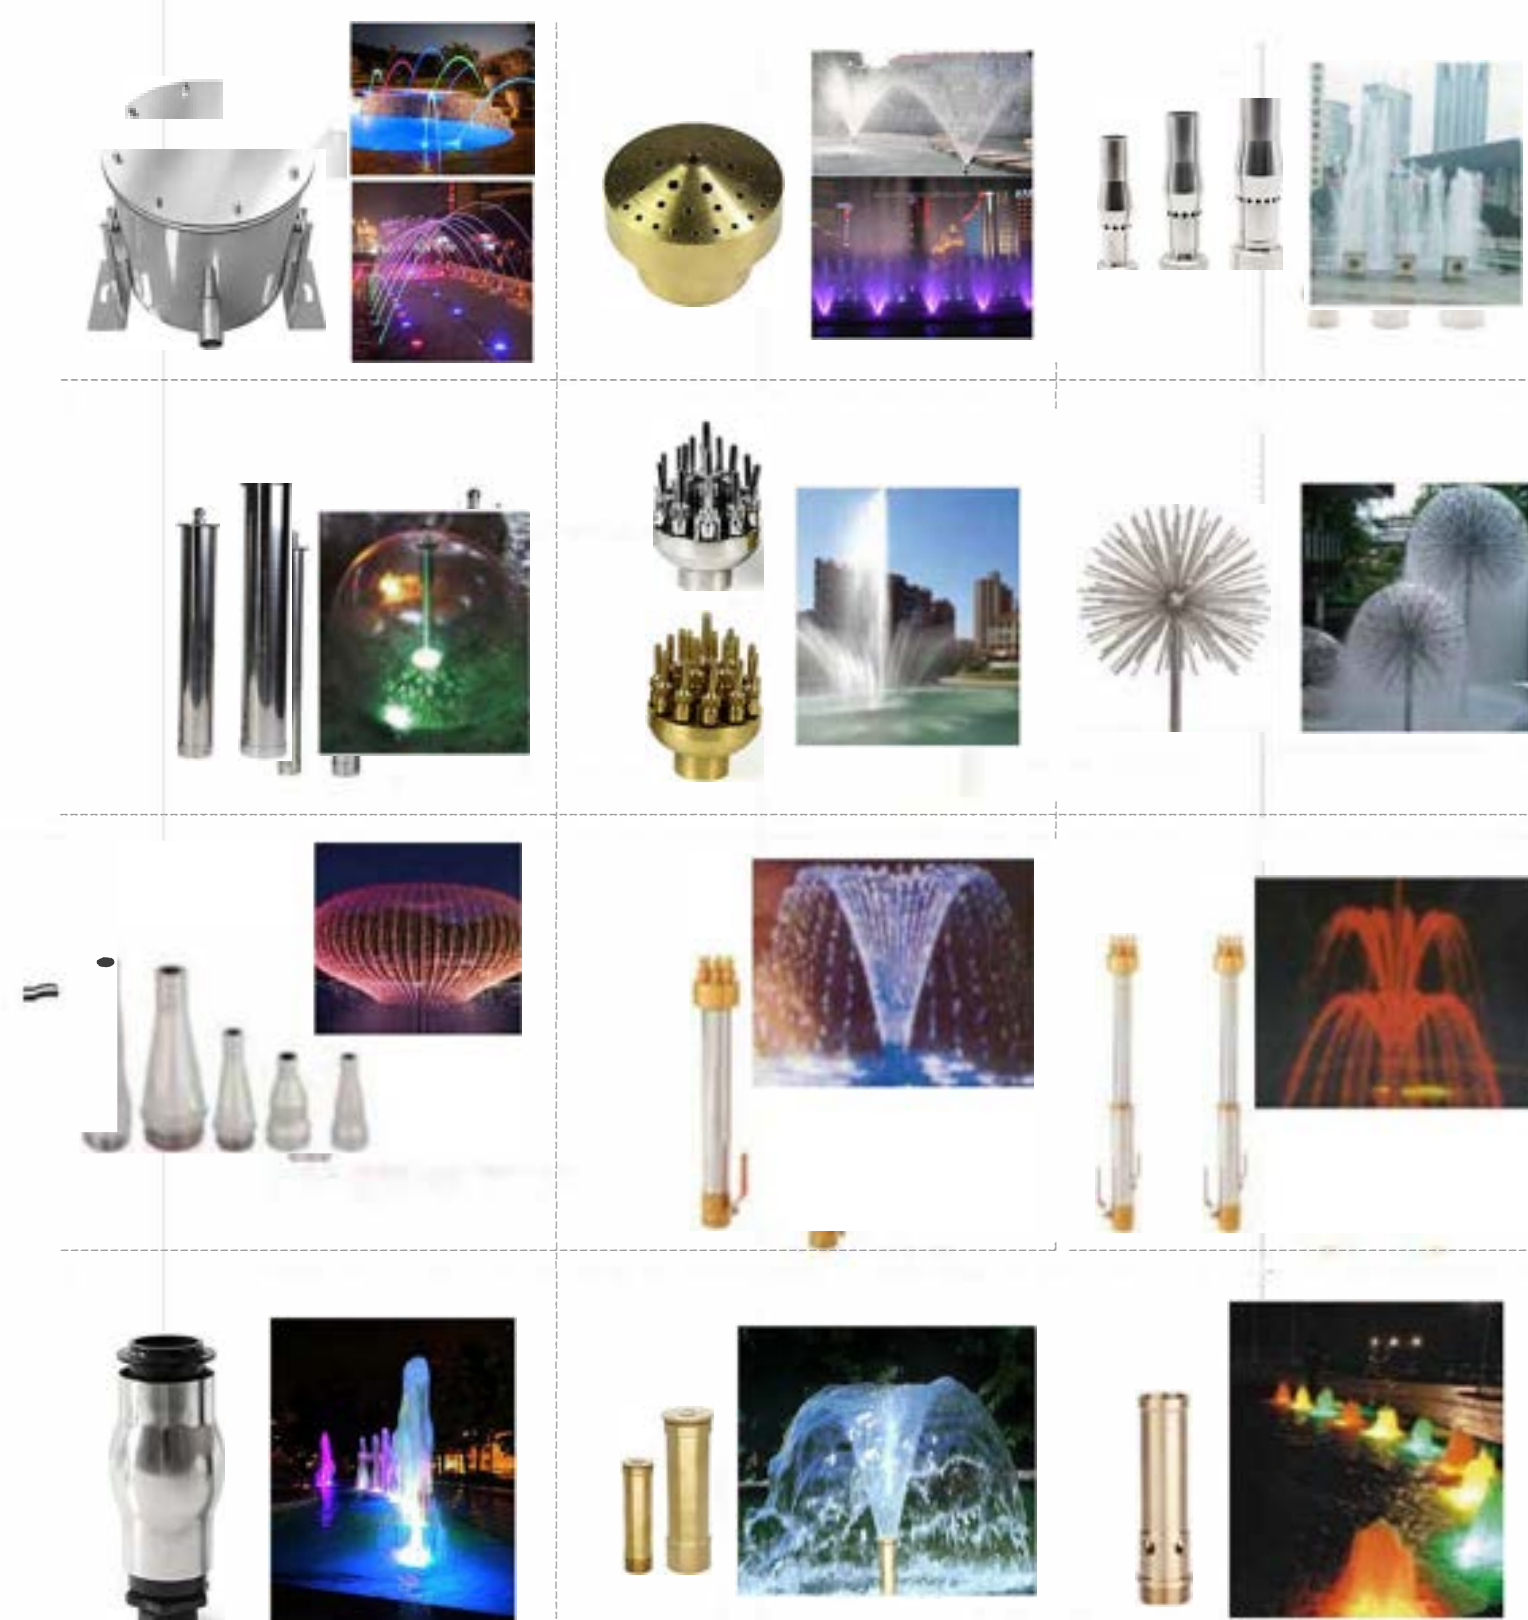

■ SPA series



■ Customizable waterfall water curtain

